

► Contents



Universal LED Work Lights

Page 1-6



LED Driving Headlights

Page 7



Heavy Duty LED Work Lights

Page 8-9



LED Tractor Lights

Page 10-19



LED Reverse Lights

Page 20-21



Forklift Warning Lights

Page 22-23



Spray Boom Lights

Page 24



Truck and Trailer Lights

Page 25-28



LED Driving Lights *Page 29-30*

Rechargeable LED Work Lights

Universal LED Work Lights

3.5 inch 10W LED Work Lights

Item No. OW-0602-10



Size: 3.5 inch
Beam Pattern: Flood/Spot
LED Type: 10pcs x 1W Osram LEDs
Power: 10 Watts
Brightness: 800 Lumens
Input Voltage: 10-30V DC
Amp Draw: 0.8A@12V/0.4A@24V
Color Temperature: 6000K(Cool White)

6 inch 16W LED Work Lights

Item No. OW-0602-16



Size: 6 inch
Beam Pattern: Flood/Spot
LED Type: 16pcs x 1W Osram LEDs
Power: 16 Watts
Brightness: 1280 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.3A@12V/0.6A@24V
Color Temperature: 6000K(Cool White)

4.4 inch 18W LED Work Lights

Item No. OW-0602-18



Size: 4.4 inch
Beam Pattern: Flood/Spot
LED Type: 18pcs x 1W Osram LEDs
Power: 18 Watts
Brightness: 1620 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.5A@12V/0.75A@24V
Color Temperature: 6000K(Cool White)

6 inch 40W LED Work Lights

Item No. OW-0602-40



Size: 6 inch
Beam Pattern: Flood/Spot
LED Type: 40pcs x 1W Osram LEDs
Power: 40 Watts
Brightness: 3600 Lumens
Input Voltage: 10-30V DC
Amp Draw: 3.3A@12V/1.6A@24V
Color Temperature: 6000K(Cool White)

4 inch 13W Oval LED Work Lights

Item No. OW-0902-13



Size: 4 inch
Beam Pattern: Flood/Spot
LED Type: 13pcs x 1W Osram LEDs
Power: 13 Watts
Brightness: 1170 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1A@12V/0.5A@24V
Color Temperature: 6000K(Cool White)

5.6 inch 32W Oval LED Work Lights

Item No. OW-0902-32



Size: 5.6 inch
Beam Pattern: Flood/Spot
LED Type: 32pcs x 1W Osram LEDs
Power: 32 Watts
Brightness: 2880 Lumens
Input Voltage: 10-30V DC
Amp Draw: 2.6A@12V/1.3A@24V
Color Temperature: 6000K(Cool White)

3 inch 12W LED Work Lights

Item No. OW-0702-12



Size: 3 inch
Beam Pattern: Flood/Spot
LED Type: 12pcs x 1W Osram LEDs
Power: 12 Watts
Brightness: 1080 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1A@12V/0.5A@24V
Color Temperature: 6000K(Cool White)

3.6 inch 16W LED Work Lights

Item No. OW-0702-16



Size: 3.6 inch
Beam Pattern: Flood/Spot
LED Type: 16pcs x 1W Osram LEDs
Power: 16 Watts
Brightness: 1440 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.3A@12V/0.6A@24V
Color Temperature: 6000K(Cool White)

4.5 inch 24W LED Work Lights

Item No. OW-0702-24



Size: 4.5 inch
Beam Pattern: Flood/Spot
LED Type: 24pcs x 1W Osram LEDs
Power: 24 Watts
Brightness: 2160 Lumens
Input Voltage: 10-30V DC
Amp Draw: 2A@12V/1A@24V
Color Temperature: 6000K(Cool White)

Universal LED Work Lights

3 inch 12W LED Work Lights

Item No. OW-0802-12



Size: 3 inch
Beam Pattern: Flood/Spot
LED Type: 12pcs x 1W Osram LEDs
Power: 12 Watts
Brightness: 1080 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1A@12V/0.5A@24V
Color Temperature: 6000K(Cool White)

3.6 inch 16W LED Work Lights

Item No. OW-0802-16



Size: 3.6 inch
Beam Pattern: Flood/Spot
LED Type: 16pcs x 1W Osram LEDs
Power: 16 Watts
Brightness: 1440 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.3A@12V/0.6A@24V
Color Temperature: 6000K(Cool White)

4.5 inch 30W LED Work Lights

Item No. OW-0802-30



Size: 4.5 inch
Beam Pattern: Flood/Spot
LED Type: 30pcs x 1W Osram LEDs
Power: 30 Watts
Brightness: 2700 Lumens
Input Voltage: 10-30V DC
Amp Draw: 2A@12V/1A@24V
Color Temperature: 6000K(Cool White)

3 inch 18W LED Work Lights

Item No. OW-0706-18



Size: 3 inch
Beam Pattern: Flood/Spot
LED Type: 6pcs x 3W Osram LEDs
Power: 18 Watts
Brightness: 1620 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.5A@12V/0.75A@24V
Color Temperature: 6000K(Cool White)

3.6 inch 27W LED Work Lights

Item No. OW-0706-3-27



Size: 3.6 inch
Beam Pattern: Flood/Spot
LED Type: 9pcs x 3W Osram LEDs
Power: 27 Watts
Brightness: 3240 Lumens
Input Voltage: 10-30V DC
Amp Draw: 2.25A@12V/1.1A@24V
Color Temperature: 6000K(Cool White)

3.6 inch 42W LED Work Lights

Item No. OW-0706-3-42



Size: 3.6 inch
Beam Pattern: Flood/Spot
LED Type: 14pcs x 3W Osram LEDs
Power: 42 Watts
Brightness: 5040 Lumens
Input Voltage: 10-30V DC
Amp Draw: 3.5A@12V/1.75A@24V
Color Temperature: 6000K(Cool White)

4.5 inch 36W LED Work Lights

Item No. OW-0706-4-36



Size: 4.5 inch
Beam Pattern: Flood/Spot
LED Type: 9pcs x 4W Osram LEDs
Power: 36 Watts
Brightness: 3240 Lumens
Input Voltage: 10-30V DC
Amp Draw: 2.3A@12V/1.5A@24V
Color Temperature: 6000K(Cool White)

4.5 inch 42W LED Work Lights

Item No. OW-0706-4-42



Size: 3.6 inch
Beam Pattern: Flood/Spot
LED Type: 14pcs x 3W Osram LEDs
Power: 42 Watts
Brightness: 5040 Lumens
Input Voltage: 10-30V DC
Amp Draw: 3.5A@12V/1.75A@24V
Color Temperature: 6000K(Cool White)

3 inch 18W LED Work Lights

Item No. OW-0806-18



Size: 3 inch
Beam Pattern: Flood/Spot
LED Type: 6pcs x 3W Osram LEDs
Power: 18 Watts
Brightness: 1620 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.5A@12V/0.75A@24V
Color Temperature: 6000K(Cool White)

Universal LED Work Lights

3.6 inch 27W LED Work Lights

Item No. OW-0806-3-27



Size: 3.6 inch
 Beam Pattern: Flood/Spot
 LED Type: 9pcs x 3W Osram LEDs
 Power: 27 Watts
 Brightness: 3240 Lumens
 Input Voltage: 10-30V DC
 Amp Draw: 2.25A@12V/1.1A@24V
 Color Temperature: 6000K(Cool White)

3.3 inch 48W LED Work Lights

Item No. OW-0806-3-48



Size: 3.3 inch
 Beam Pattern: Flood/Spot
 LED Type: 16pcs x 3W Osram LEDs
 Power: 48 Watts
 Brightness: 4320 Lumens
 Input Voltage: 10-30V DC
 Amp Draw: 4A@12V/2A@24V
 Color Temperature: 6000K(Cool White)

4.5 inch 36W LED Work Lights

Item No. OW-0806-4-36



Size: 4.5 inch
 Beam Pattern: Flood/Spot
 LED Type: 9pcs x 4W Osram LEDs
 Power: 36 Watts
 Brightness: 3240 Lumens
 Input Voltage: 10-30V DC
 Amp Draw: 3A@12V/1.5A@24V
 Color Temperature: 6000K(Cool White)

4.5 inch 64W LED Work Lights

Item No. OW-0806-4-64



Size: 4.5 inch
 Beam Pattern: Flood/Spot
 LED Type: 16pcs x 4W Osram LEDs
 Power: 64 Watts
 Brightness: 5760 Lumens
 Input Voltage: 10-30V DC
 Amp Draw: 5.3A@12V/2.6A@24V
 Color Temperature: 6000K(Cool White)

3.25 inch Round 12W LED Work Light

Item No. WL-0121



Size: 3.2 inch
 Beam Pattern: Flood/Spot
 LED Type: 4pcs x 3W Epistar LEDs
 Power: 12 Watts
 Brightness: 840 Lumens
 Input Voltage: 10-30V DC
 Amp Draw: 1A @ 12V & 0.5A @ 24V
 Color Temperature: 6000K(Cool White)

3 inch 12W LED Work Lights

Item No. OW-3011



Size: 2.8 inch
 Beam Pattern: Flood/Spot
 LED Type: 4pcs x 3W CREE LEDs
 Power: 12 Watts
 Brightness: 960 Lumens
 Input Voltage: 10-30V DC
 Amp Draw: 1A @ 12V & 0.5A @ 24V
 Color Temperature: 6000K(Cool White)

3 inch 12W LED Cube Lights

Item No. OW-3013



Size: 3.15 inch
 Beam Pattern: Flood/Spot
 LED Type: 4pcs x 3W CREE LEDs
 Power: 12 Watts
 Brightness: 960 Lumens
 Input Voltage: 10-30V DC
 Amp Draw: 1A@12V & 0.5A@24V
 Color Temperature: 6000K(Cool White)

12W Flush Mount LED Work Light

Item No. OW-3013F



Size: Size: 4.8" x 3.6" x 3.2" (W x H xD)
 Beam Pattern: Flood/Spot
 LED Type: 3 CREE, 4 Watt LED
 Power: 12 Watts
 Brightness: 960 Lumens
 Input Voltage: 10-30V DC
 Amp Draw: 1.25A @ 12V & 0.75A @ 24V
 Color Temperature: 6000K(Cool White)

3 inch 18W LED Cube Light

Item No. OW-3019



Size: 3.15 inch
 Beam Pattern: Flood/Spot
 LED Type: 6pcs x 3W CREE LEDs
 Power: 18 Watts
 Brightness: 1440 Lumens
 Input Voltage: 10-30V DC
 Amp Draw: 1.5A @ 12V & 0.75A @ 24V
 Color Temperature: 6000K(Cool White)

Universal LED Work Lights

18W Flush Mount LED Work Light

Item No. OW-3019F



Size: 4.8" x 3.6" x 3.2" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 6 CREE, 3 Watt LED
Power: 18 Watts
Brightness: 1440 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.25A @ 12V & 0.75A @ 24V
Color Temperature: 6000K(Cool White)

3 inch 18W LED Work Lights

Item No. WL-0184



Size: 3 inch
Beam Pattern: Flood/Spot
LED Type: 6pcs x 3W Epistar LEDs
Power: 18 Watts
Brightness: 1260 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.5A @ 12V & 0.7A @ 24V
Color Temperature: 6000K(Cool White)

7.6 inch 18W Flush Mount LED Work Light

Item No. WL-0189



Size: 7.6" x 2.5" x 1.8" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 6pcs x 3W CREE LEDs
Power: 18 Watts
Brightness: 1440 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.5A @ 12V & 0.75A @ 24V
Color Temperature: 6000K(Cool White)

5 inch 48W CREE LED Work Lights

Item No. WL-0482



Size: 5 inch
Beam Pattern: Flood/Spot
LED Type: 16pcs x 3W CREE LEDs
Power: 48 Watts
Brightness: 3800 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 4A @ 12V & 2A @ 24V
Color Temperature: 6000K(Cool White)

4.5 inch Square 40W LED Work Light

Item No. WL-0402



Size: 5 inch
Beam Pattern: Flood/Spot
LED Type: 4pcs x 10W CREE LEDs
Power: 40 Watts
Brightness: 3200 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A @ 12V & 1.6A @ 24V
Color Temperature: 6000K(Cool White)

6.3 inch 40W LED Work Lights

Item No. OW-6040-40



Size: 6.25 inch
Beam Pattern: Flood/Spot
LED Type: 4pcs x 10W CREE LEDs
Power: 40 Watts
Brightness: 3200 Lumens
Input Voltage: 10-30V DC
Amp Draw: 3.3A @ 12V & 1.7A @ 24V
Color Temperature: 6000K(Cool White)

3.4 inch 20W LED Work Lights

Item No. OW-0601-20



Size: 3.4 inch
Beam Pattern: Flood/Spot
LED Type: 2pcs x 10W Osram
Power: 20 Watts
Brightness: 1800 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.7A @ 12V & 0.8A @ 24V
Color Temperature: 6000K(Cool White)

4.4 inch 30W LED Work Lights

Item No. OW-0601-30



Size: 4.4 inch
Beam Pattern: Flood/Spot
LED Type: 3pcs x 10W Osram LEDs
Power: 30 Watts
Brightness: 2400 Lumens
Input Voltage: 10-30V DC
Amp Draw: 2.5A @ 12V & 1.25A @ 24V
Color Temperature: 6000K(Cool White)

6 inch 40W LED Work Lights

Item No. OW-0601-40



Size: 6 inch
Beam Pattern: Flood/Spot
LED Type: 8pcs x 5W Osram LEDs
Power: 40 Watts
Brightness: 3200 Lumens
Input Voltage: 10-30V DC
Amp Draw: 3.3A @ 12V & 1.7A @ 24V
Color Temperature: 6000K(Cool White)

Universal LED Work Lights

7.4 inch 75W LED Work Lights

Item No. OW-0601-75



Size: 7.4 inch
Beam Pattern: Flood/Spot
LED Type: 15pcs x 5W Osram LEDs
Power: 75 Watts
Brightness: 6000 Lumens
Input Voltage: 10-30V DC
Amp Draw: 6.25A @ 12V & 3.125A @ 24V
Color Temperature: 6000K(Cool White)

2 inch 10W LED Work Lights

Item No. OW-0701-10



Size: 2.2 inch
Beam Pattern: Flood/Spot
LED Type: 1pc x 10W Osram LEDs
Power: 10 Watts
Brightness: 900 Lumens
Input Voltage: 10-30V DC
Amp Draw: 0.8A@12V/0.4A@24V
Color Temperature: 6000K(Cool White)

3.3 inch 40W Round LED Work Lights

Item No. OW-0701-40



Size: 3.3 inch
Beam Pattern: Flood/Spot
LED Type: 4pcs x 10W Osram LEDs
Power: 40 Watts
Brightness: 3200 Lumens
Input Voltage: 10-30V DC
Amp Draw: 3.3A@12V/1.6A@24V
Color Temperature: 6000K(Cool White)

3.7 inch 50W Round LED Work Lights

Item No. OW-0701-50



Size: 3.7 inch
Beam Pattern: Flood/Spot
LED Type: 5pcs x 10W Osram LEDs
Power: 50 Watts
Brightness: 4000 Lumens
Input Voltage: 10-30V DC
Amp Draw: 4.2A@12V/2A@24V
Color Temperature: 6000K(Cool White)

4 inch 60W Round LED Work Lights

Item No. OW-0701-60



Size: 4 inch
Beam Pattern: Flood/Spot
LED Type: 6pcs x 10W Osram LEDs
Power: 60 Watts
Brightness: 4800 Lumens
Input Voltage: 10-30V DC
Amp Draw: 5A@12V/2.5A@24V
Color Temperature: 6000K(Cool White)

5 inch 90W Round LED Work Lights

Item No. OW-0701-90



Size: 5 inch
Beam Pattern: Flood/Spot
LED Type: 9pcs x 10W Osram LEDs
Power: 90 Watts
Brightness: 7200 Lumens
Input Voltage: 10-30V DC
Amp Draw: 7.5A@12V/3.75A@24V
Color Temperature: 6000K(Cool White)

2 inch 10W LED Work Lights

Item No. OW-0801-10



Size: 2 inch
Beam Pattern: Flood
LED Type: 1pc x 10W Osram
Power: 10 Watts
Brightness: 900 Lumens
Input Voltage: 10-30V DC
Amp Draw: 0.8A@12V/0.4A@24V
Color Temperature: 6000K(Cool White)

3 inch 40W LED Work Lights

Item No. OW-0801-40



Size: 3 inch
Beam Pattern: Flood
LED Type: 4pcs x 10W Osram
Power: 40 Watts
Brightness: 3200 Lumens
Input Voltage: 10-30V DC
Amp Draw: 3.3A@12V/1.6A@24V
Color Temperature: 6000K(Cool White)

3.4 inch 50W LED Work Lights

Item No. OW-0801-50



Size: 3.4 inch
Beam Pattern: Flood
LED Type: 5pcs x 10W Osram
Power: 50 Watts
Brightness: 4000 Lumens
Input Voltage: 10-30V DC
Amp Draw: 4.2A@12V/2A@24V
Color Temperature: 6000K(Cool White)

Universal LED Work Lights

4 inch 60W LED Work Lights

Item No. OW-0801-60



Size: 4 inch
Beam Pattern: Flood
LED Type: 6pcs x 10W Osram
Power: 60 Watts
Brightness: 4800 Lumens
Input Voltage: 10-30V DC
Amp Draw: 5A@12V/2.5A@24V
Color Temperature: 6000K(Cool White)

5 inch 90W LED Work Lights

Item No. OW-0801-90



Size: 5 inch
Beam Pattern: Flood
LED Type: 9pcs x 10W Osram
Power: 90 Watts
Brightness: 7200 Lumens
Input Voltage: 10-30V DC
Amp Draw: 7.5A@12V/3.75A@24V
Color Temperature: 6000K(Cool White)

5.8 inch 120W LED Work Lights

Item No. OW-0801-120



Size: 5.8 inch
Beam Pattern: Flood
LED Type: 12pcs x 10W Osram
Power: 120 Watts
Brightness: 9600 Lumens
Input Voltage: 10-30V DC
Amp Draw: 10A@12V/5A@24V
Color Temperature: 6000K(Cool White)

LED Driving Headlights

6x4 in LED Headlight with DRL

Item No. OW-5721



- Road legal as RHD high low beam led headlight
- Meets the following approvals ECE-R149 (ECE-R112), ECE-R148(ECE-R7) and ECE-R10
- 30w low beam 30w high beam
- Includes 9w DRL park light
- 11220 lumen used as a pair
- Absolute quality build
- Supplied as a direct plug and play upgrade - fits in minimal time

LED Headlight for New Holland Tractor

Item No. OW-5722



- Hi Beam = 60 Watt, Lo Beam = 30 Watt, DRL = 12 Watt
- Size: 157 x 105 x 80mm
- 5600 Lumen
- IP68 (Rated Against Moisture Ingress)
- Operation Temperature: -40°C~60°C
- EMC Electrical Interference Protection To CISPR25 CLASS 4
- ECE-R149 (ECE-R112), ECE-R148(ECE-R7) and ECE-R10 Diecast Aluminium Housing
- Supplied as a direct plug and play upgrade - fits in minimal time

High Low Beam LED Driving Headlight

Item No. OW-4991



- Lamp width: 157 mm
- Lamp height: 117 mm
- Lamp thickness: 80 mm
- 30 watts in low beam and 50 watts in high beam
- Osram LED Chips
- 10-30V DC
- IP68Diecast Aluminium Housing
- Equipped with E mark 112R, 10R

LED Round Headlight Lamp 3788221M91

Item No. OW-5601



- Suitable power supply of 10 to 30V DC
- Hi-Lo beam in one light
- Daylight running position light
- 3 Tab OEM fixing point
- RHD approvals R112, R7
- Hard coated unbreakable polycarbonate lens
- Fitted H4 connector but we have other connector too - please just ask IP69K protection rated, Suit 10 to 30 vdc
- 140mm diameter x 87mm depth

Combination Heavy Duty LED Driving Light with Turn Indicator

Item No. OW-9102



- LED Power: 82W • Operating Voltage: 9-32 V DC
- High intensity OSRAM LEDs • Waterproof rate: IP68
- Color Temperature: 6000K
- Material: Diecast aluminum housing
- Lens material: PC
- Beam: 30W Low beam+60W High beam, with 12W Day Running Light, 12W Front turn signal light+Rear turn signal light
- 30000 hours above life time
- Dimension: 229*173*106MM (W*H*D)
- Certificates: CE/RoHS/E-Mark R10+R112+R87+R6

Heated Lens LED Snow Plow Driving Headlight

Item No. OW-9127



- Multifunction Design with DRL and Turn Signal
- Precision LED Reflector Facing Technology
- Dual Mounting Options: Bottom Mount/ Rear Mount
- Multi-Directional Turn Signal Positioning
- Patented De-Icing Lens Heater System
- Stainless Steel Anti-Corrosive Components
- Under/Over Voltage and Reverse Polarity Protection
- LED Lifespan 80,000+ Hours/ 1 Year Warranty
- Compliant with ECE R112 / R10 / R7 / R6

9 inch Oval DELTA/ Oval LED Driving Light with Position Light

Item No. OW-9721



- 60W+12W DRL/Position Light
- Osram LEDs
- 10-30V DC
- High beam + DRL
- E-mark ECE-R112, ECE R87
- EMC CISPR 25 CLASS 4
- Position Light

5.6 Inch Round Universal High Low Beam LED Headlights (HELLA 1A3 996 162-331)

Item No. OW-5602



- High Beam = 60 Watt, Low Beam = 30 Watt
- Size: 144 x 203 x 115mm
- 5600 Lumen
- IP 68
- EMC to CISPR25 Class 4
- ECE R112, ECE R10
- Diecast Aluminium Housing
- Supplied with H4 Plug & Play Connector

8 Inch 90W Oval LED Tractor Lights For Massey Ferguson (4291301M92, 4291301M91)

Item No. OW-8961



- High Beam=90W, Low Beam=30W, Day Time Running Light=6W
- Size: 208x150x118mm
- Osram LEDs
- IP 68
- 10-30V DC

Heavy Duty LED Work Lights

4 inch 27W LED Work Lights

Item No. M-0271



Size: 4.25" x 5.5" x 2.8" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 9 Cree, 3 Watt LED
Power: 27 Watts
Brightness: 2200 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.2A @ 12V & 1.1A @ 24V
Color Temperature: 6000K(Cool White)

4 inch 40W LED Work Lights

Item No. M-0401



Size: 4.25" x 4.6" x 2.8" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 4 Cree, 10 Watt LED
Power: 40 Watts
Brightness: 3800 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A @ 12V & 1.6A @ 24V
Color Temperature: 6000K(Cool White)

5 inch 48W LED Work Lights

Item No. M-0481



Size: 5" x 4.5" x 4" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 16 Cree, 3 Watt LED
Power: 48 Watts
Brightness: 3840 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 4A @ 12V & 2A @ 24V
Color Temperature: 6000K(Cool White)

5 inch 50W LED Work Lights

Item No. M-0501



Size: 4.92" x 4.65" x 4" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 5 Cree, 10 Watt LED
Power: 50 Watts
Brightness: 4500 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 4.2A @ 12V & 2.1A @ 24V
Color Temperature: 6000K(Cool White)

5 inch 60W LED Work Lights

Item No. M-0601



Size: 4.92" x 4.65" x 4" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 12 Cree, 5 Watt LED
Power: 60 Watts
Brightness: 5400 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5A @ 12V & 2.5A @ 24V
Color Temperature: 6000K(Cool White)

6 inch 90W LED Work Lights

Item No. M-0901



Size: 6" x 5.55" x 4.54" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 9 Cree, 10 Watt LED
Power: 90 Watts
Brightness: 8100 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 7.5A @ 12V & 3.75A @ 24V
Color Temperature: 6000K(Cool White)

6 inch 100W LED Work Lights

Item No. M-1001



Size: 6" x 5.55" x 4.54" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 20 Cree, 5 Watt LED
Power: 100 Watts
Brightness: 9000 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 8.4A @ 12V & 4.2A @ 24V
Color Temperature: 6000K(Cool White)

7.4 inch 120W LED Work Lights

Item No. M-1201



Size: 7.4" x 6.6" x 5.3" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 12 Cree, 10 Watt LED
Power: 120 Watts
Brightness: 9600 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 10A @ 12V & 5A @ 24V
Color Temperature: 6000K(Cool White)

4.8 inch 50W Heavy Duty LED Work Lights

Item No. OW-0407-50



Size: 4.8inch 50W
Beam Pattern: Flood/Spot
LED Type: 5 Osram, 10 Watt LED
Power: 50 Watts
Brightness: 4000 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 4.2A @ 12V & 2.1A @ 24V
Color Temperature: 6000K(Cool White)

Heavy Duty LED Work Lights

5.7 inch 60W Heavy Duty LED Work Lights

Item No. OW-0407-60



Size: 5.7inch 60W

Beam Pattern: Flood/Spot

LED Type: 6 Osram, 10 Watt LED

Power: 60 Watts

Brightness: 4800 Lumens

Input Voltage: 12-Volt to 24-Volt

Amp Draw: 5A @ 12V & 2.5A @ 24V

Color Temperature: 6000K(Cool White)

6.4 inch 90W Heavy Duty LED Work Lights

Item No. OW-0407-90



Size: 6.4inch 90W

Beam Pattern: Flood/Spot

LED Type: 9 Osram, 10 Watt LED

Power: 90 Watts

Brightness: 7200 Lumens

Input Voltage: 12-Volt to 24-Volt

Amp Draw: 7.5A @ 12V & 3.75A @ 24V

Color Temperature: 6000K(Cool White)

LED Tractor Lights

PAR 36 LED Tractor Lights - 18W 4.5 inch

Item No. WL-0187



36-Par replacement LED Sealed Beam Light

Size: 4.5" x 1.5" (W x D)
Beam Pattern: Flood/spot/High Low
LED Type: 6 LED's
Power: 18 Watts
Brightness: 1,440 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 1.5A
 Use original mount and wiring

John Deere 4.5 inch LED Flood Fender Light/Hood Light

Item No. WL-0187N



Size: 4.5" diameter
Beam Pattern: Sealed beam with flood beam pattern
LED Type: 6 LED's
Power: 18 Watts
Brightness: 6 diodes(3 watts each) provide 1440 lumens
Input Voltage: 6-Volt to 32-Volt
Operating temperature: -40 to 140 degree Fahrenheit/-40 to 60 degree Celsius

AC/Case/Cat/Ford/IH/JD/MF LED Cab/Fender/Hood Light (2200 Lumens) - Hi/Lo

Item No. WL-0247



Tiger Lights TL3025 Light

Size: 4.5" x 1.5" (W x D)
Beam Pattern: Flood/spot/High Low
LED Type: 8 LED's
Power: 24 Watts
Brightness: 2,200 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2A

John Deere 7020-7030/8020-8030/8R Series LED Hood Light - Hi/Lo

Item No. WL-0187WR



Tiger Lights TL3005 Light

Size: 4.5" x 1.5" (W x D)
Beam Pattern: Red/Flood/Spot
LED Type: 6 LED's
Power: 18 Watts
Brightness: 1,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 1.5A

5.3 inch 18W LED Work Light For John Deere

Item No. WL-0180



Tiger Lights TL7820 Light

Size: 5.23" x 4" (W x D)
Beam Pattern: Flood/Spot/Trapezoid/Hi-Lo
LED Type: 6 Cree, 3 Watt LED
Power: 18 Watts
Brightness: 1,260 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 1.5A @ 12V & 0.75A @ 24V
Color Temperature: 6000K (Cool White)

Challenger MT400D-MT500D/Massey Ferguson 5400-7700 LED Upper Cab Light

Item No. OW-4401



Tiger Lights TL7090 Light

Size: 6.6" x 4" x 3" (W x H x D)
Beam Pattern: Flood
LED Type: 8 CREE, 5 Watt LEDs
Power: 40 Watts
Brightness: 3200 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A @ 12V & 1.7A @ 24V
Color Temperature: 6000K(Cool White)

Claas/John Deere/Massey Ferguson LED Cab/Fender Light

Item No. OW-4402



Tiger Lights TL9090 Light

Size: 7.25" x 3.25" x 3.25" (W x H x D)
Beam Pattern: Flood
LED Type: 6 LED's
Power: 30 Watts
Brightness: 2,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.5A

John Deere 5D-7030 Series LED Hood Light - Hi/Lo

Item No. WL-0609B



Tiger Lights TL6420 Light

Size: 6" x 4" (W x H)
Beam Pattern: Flood/Spot
LED Type: 12 LED's
Power: 60 Watts
Brightness: 3,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5A

John Deere 9000-ST5 Series Combine LED Inner Cab Light

Item No. WL-0609C



Tiger Lights TL9000 Light

Size: 6" x 4" (W x H)
Beam Pattern: Flood/Spot
LED Type: 12 LED's
Power: 60 Watts
Brightness: 3,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5A

LED Tractor Lights

Case IH 2144-2588 Combine/
Case Tractor LED Cab/Hood Light - Hi/Lo

Item No. WL-0609D



Tiger Lights TL6090 Light

Size: 6" x 4" (W x H)
Beam Pattern: Flood/Spot
LED Type: 12 LED's
Power: 60 Watts
Brightness: 3,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5A

Case IH 2144-2588 Combine
LED Cab Light

Item No. WL-0609E



Tiger Lights TL6080 Light

Size: 6" x 4" (W x H)
Beam Pattern: Flood/Spot
LED Type: 12 LED's
Power: 60 Watts
Brightness: 3,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5A

AGCO DT, Allis, White/Challenger/
MF LED Front Hood Light - Hi/Lo

Item No. WL-0609F(TL6040)



Tiger Lights TL6040 Light

Size: 6" x 4" (W x H)
Beam Pattern: Flood/Spot
LED Type: 12 LED's
Power: 60 Watts
Brightness: 3,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5A

AGCO RT/Challenger MT/Massey Ferguson
LED Cab/Front Hood Light - Hi/Lo

Item No. WL-0609F(TL6050)



Tiger Lights TL6050 Light

Size: 6" x 4" (W x H)
Beam Pattern: Flood/Spot
LED Type: 12 LED's
Power: 60 Watts
Brightness: 3,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5A

Case IH Steiger 9100-9300 Series/
Steiger LED Hood Light - Hi/Lo

Item No. WL-0609G



Tiger Lights TL2020 Light

Size: 8.25" x 5.75" (W x H)
Beam Pattern: Flood/spot/High-Low
LED Type: 12 LED's
Power: 60 Watts
Brightness: 3,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5A

John Deere 6000-7010 Series
LED Hood Light - Hi/Lo

Item No. WL-0609K



Tiger Lights TL6700 Light

Size: 6" x 4" (W x H)
Beam Pattern: Flood/Spot
LED Type: 12 LED's
Power: 60 Watts
Brightness: 3,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5A

Allis Chalmers/Case IH/Steiger
LED Cab/Fender Light

Item No. WL-0501



Tiger Lights TL175F Light

Size: 6" x 4" (W x H)
Beam Pattern: Flood/Spot
LED Type: 5 LED's
Power: 50 Watts
Brightness: 4,800 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 4.16A

AC/Case/Cat/Ford/IH/JD/MF LED Cab/
Fender/Hood Light - Bottom Mount

Item No. WL-0408A



Tiger Lights TL2080 Light

Size: 4.5" diameter x 3.5" depth
Beam Pattern: Trapezoid
LED Type: 4 LED's
Power: 40 Watts
Brightness: 2,800 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A

AC/Case/Cat/Ford/IH/JD/MF LED Cab/
Fender/Hood Light - Rear Mount

Item No. WL-0408B



Tiger Lights TL2060 Light

Size: 4.5" diameter x 3.5" depth
Beam Pattern: Trapezoid
LED Type: 4 LED's
Power: 40 Watts
Brightness: 2,800 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A

LED Tractor Lights

Ford-New Holland 70 Genesis/Komatsu
LED Cab/Fender Light - Bottom Mount

Item No. WL-4001



Tiger Lights TL3050 Light

Size: 6" x 3.5" x 3" (W x H x D)
Beam Pattern: Flood
LED Type: 8 LED's
Power: 40 Watts
Brightness: 3,600 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A

Case IH 71-89 Mag-MX/MF LED Cab/
Handrail Light - Swivel Side Mount

Item No. WL-4002



Tiger Lights TL3070 Light

Size: 6.5" x 3.5" x 3" (W x H x D)
Beam Pattern: Flood
LED Type: 8 LED's
Power: 40 Watts
Brightness: 3,600 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A

Case IH 71-89 Series Magnum LED
Left-Hand Wraparound Hood Light - Hi/Lo

Item No. WL-1005L



Tiger Lights TL7140L Light

Size: 10" x 5" x 5.5" (W x H x D)
Beam Pattern: Flood/Spot
Power: 100 Watts
Brightness: 7,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 8.3A

Case IH 71-89 Series Magnum LED
Right-Hand Wraparound Hood Light - Hi/Lo

Item No. WL-1005R



Tiger Lights TL7140R Light

Size: 10" x 5" x 5.5" (W x H x D)
Beam Pattern: Flood/Spot
Power: 100 Watts
Brightness: 7,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 8.3A

6 inch 40W Rectangular LED Work Lights

Item No. WL-0451



Tiger Lights TL130F Light

Size: 6" x 4" (W x H) rectangular light
Beam Pattern: Flood
LED Type: 15 LED's
Power: 55 Watts
Brightness: 3,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 4.5A

Kubota SVL Series Skid Steer
LED Headlight

Item No. TL790



Tiger Lights TL790 Light

Size: 6" x 3" x 2.5" (W x H x D)
Beam Pattern: Flood
Power: 40 Watts
Brightness: 3,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.33A

Case IH CS-Puma/New Holland
T6000-TS-A Series LED Upper Cab Light

Item No. TL7040



Tiger Lights TL7040 Light

Size: 6" x 3" x 2.5" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 8 LED's
Power: 40 Watts
Brightness: 3,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.33A

John Deere S-T-W Series Combine
LED Upper Cab Light

Item No. OW-3030



Tiger Lights TL8090 Light

Size: 4.5" x 3.34" x 2.85" (W x H x D)
Beam Pattern: Flood
LED Type: 3 LED's
Power: 30 Watts
Brightness: 2,200 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.5A

Case IH/Challenger/John Deere/
New Holland LED Front Hood Light

Item No. WL-0409A



Tiger Lights TL6020 Light

Size: 3.37" diameter x 2" depth
Beam Pattern: Flood
LED Type: 4 LED's
Power: 32 Watts
Brightness: 3,200 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.6A

LED Tractor Lights

New Holland T6000-TS Series LED Hood Light

Item No. WL-0409B



Tiger Lights TL6025 Light

Size: 3.37" diameter x 2" depth
Beam Pattern: Flood
LED Type: 4 LED's
Power: 32 Watts
Brightness: 3,200 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.6A

Case IH/John Deere Combine LED Auger/Field/Stubble Light

Item No. WL-0391



Tiger Lights TL5655 Light

Size: 5.75" x 3.75" x 3" (W x H x D) oval
Beam Pattern: Flood
LED Type: 13 LED's
Power: 39 Watts
Brightness: 2,900 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3A

Buhler/Versatile/John Deere 8020-9030T Series LED Oval Hood Light

Item No. WL-0392



Tiger Lights TL8220 Light (also TL9220)

Size: 5.5" x 3.75" x 3" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 13 LED's
Power: 39 Watts
Brightness: 3,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3A

John Deere 7020-9030 Series/Versatile LED Cab/Fender Light

Item No. WL-0651



Tiger Lights TL5680 Light

Size: 6.5" x 4.5" x 4" (W x H x D) oval
Beam Pattern: Flood
LED Type: 13 LED's
Power: 65 Watts
Brightness: 5,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5.4A

Case IH 5088-9230 Combine LED Cab Light

Item No. WL-0652



Tiger Lights TL8420 Light

Size: 6.5" x 4.5" x 4" (W x H x D)
Beam Pattern: Flood
LED Type: 13 LED's
Power: 65 Watts
Brightness: 6,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5.4A

John Deere 7020-7030/8020-8030/8R Series LED Hood Light - Hi/Lo

Item No. TL7820



Tiger Lights TL7820 Light

Size: 7.12" x 4.75" x 3" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 13 LED's
Power: 65 Watts
Brightness: 5,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5.4A

John Deere 40-8010T Series LED Cab/Hood Light

Item No. WL-0203



Tiger Lights RE306510 Light

Size: 5.5" x 2" x 1.5" (W x H x D)
Beam Pattern: Flood
LED Type: 4 LED's
Power: 20 Watts
Brightness: 1,440 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 1.6A

Case/John Deere/New Holland Skid Steer LED Headlight

Item No. WL-4038



Tiger Lights TL750 Light

Size: 5" x 3" x 3" (W x H x D)
Beam Pattern: Flood
LED Type: 8 LED's
Power: 40 Watts
Brightness: 3,600 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A

Bobcat/New Holland Skid Steer LED Headlight

Item No. WL-4036



Tiger Lights TL650 Light

Size: 5" x 3" x 3" (W x H x D)
Beam Pattern: Flood
LED Type: 8 LED's
Power: 40 Watts
Brightness: 3,600 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A

LED Tractor Lights

Case/New Holland Skid Steer LED Headlight

Item No. TL780



Tiger Lights TL780 Light

Size: 4.75" x 3.2" x 2.5" (W x H x D)
Beam Pattern: Flood
LED Type: 6 LED's
Power: 30 Watts
Brightness: 2,100 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.5A

John Deere 7020-7030 Series LED Left-Hand Outer Hood Light - Hi

Item No. TL7830L



Tiger Lights TL7830L Light

Size: 6.5" x 4.75" x 2.75" (W x H x D)
Beam Pattern: Flood
LED Type: 6 LED's
Power: 30 Watts
Brightness: 2,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.5A

John Deere 7020-7030 Series LED Right-Hand Outer Hood Light - Hi

Item No. TL7830R



Tiger Lights TL7830R Light

Size: 6.5" x 4.75" x 2.75" (W x H x D)
Beam Pattern: Flood
LED Type: 6 LED's
Power: 30 Watts
Brightness: 2,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.5A

John Deere 7000-9000 Series LED Fender/Handrail Light - Interchangeable Mount

Item No. TL8400



Tiger Lights TL8400 Light

Size: 5.5" x 3.25" x 2.25" (W x H x D)
Beam Pattern: Flood
LED Type: 8 LED's
Power: 40 Watts
Brightness: 3,200 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.2A

John Deere 50-8050 Series LED Rear Fender Light

Item No. WL-0403



Tiger Lights RE19079 Light

Size: 4.5" diameter x 2.5" depth
Beam Pattern: Flood
LED Type: 4 LED's
Power: 40 Watts
Brightness: 3,200 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A

John Deere 5E-7030 Series LED Cab Light

Item No. TL5670



Tiger Lights TL5670 Light

Size: 4.25" x 4.5" x 3" (W x H x D) oval
Beam Pattern: Flood
LED Type: 4 LED's
Power: 40 Watts
Brightness: 3,200 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.2A

John Deere 7-1/2-inch Oval LED Replacement Pedestal Mounted Flood Lamp - RE573609

Item No. WL-6045



Direct replacement for RE269638 and RE269640

Size: 3.25" X 6.5" (W x H)
Beam Pattern: Flood/High-Low
Power: 45 Watts
Brightness: 2,750 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.2A @ 12V, 1.6A@24V

John Deere 7-1/2-inch Oval LED Replacement Flood Lamp - RE331642

Item No. WL-6046



Drop-in Replacement for RE269637

Draws: 2.5 watts at 12 volts
Size: 7-1/2-inch oval
Power: 45Watts
 As a drop-in replacement for RE269637, this LED installs in seconds and will maintain the look of your tractor or sprayer with new and improved performance.

Fits on the following machines: 6R, 7R, 8R/RT, 9R/RT Series tractors and R4030, R4038, R4045 sprayers

John Deere 7-1/2-inch Oval LED Replacement Flood Lamp - RE331642

Item No. WL-6047



Drop-in Replacement for RE269637

Draws: 2.5 watts at 12 volts
Size: 7-1/2-inch oval
Power: 45Watts
 As a drop-in replacement for RE269637, this model does not include the plastic bezel, use OEM hardware.

LED Tractor Lights

John Deere 50-55 Series LED Hood Light Conversion Kit

Item No. **TL4000**



Tiger Lights TL4000 Light Kit

Size: 5.5" x 2" x 1.5" (W x H x D)
Beam Pattern: Flood
LED Type: 4 LED's
Power: 90 Watts (combined)
Brightness: 1,440 effective Lumens (combined 4,320)
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 7.5A (combined)

John Deere 50-60 Series LED Hood Light Conversion Kit

Item No. **TL4900**




Tiger Lights TL4900 Light Kit

Size: 5.5" x 2" x 1.5" (W x H x D)
Beam Pattern: Flood
LED Type: 4 LED's
Power: 120 Watts (combined)
Brightness: 1,440 effective Lumens (combined 5,760)
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 10A (combined)

Bobcat Skid Steer LED Headlight

Item No. **WL-B180**



Tiger Lights TL950 Light

Size: 7" x 7" (W x H)
Beam Pattern: Flood/Spot
Power: 30 Watts
Brightness: 2,500 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.5A

Bobcat M Series Skid Steer LED Left-Hand Headlight

Item No. **TL970L**



Tiger Lights TL970L Light

Size: 7" x 7" (W x H)
Beam Pattern: Flood/Spot
Power: 70 Watts
Brightness: 5,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5.8A

Bobcat M Series Skid Steer LED Right-Hand Headlight

Item No. **TL970R**



Tiger Lights TL970R Light

Size: 7" x 7" (W x H)
Beam Pattern: Flood
Power: 70 Watts
Brightness: 5,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5.8A

Combination Heavy Duty LED Driving Light with Turn Indicator

Item No. **OW-9102**



Tiger Lights TL790 Light

Size: 6" x 3" x 2.5" (W x H x D)
Beam Pattern: 30W Low beam+60W High beam
LED Type: High intensity OSRAM LEDs
LED Power: 82Watts
Life Time: 30,000 hours above life time
Operating Voltage: 9-32 V DC
Material: Diecast aluminum housing
Waterproof rate: IP68
Color Temperature: 6000K
Certificates: CE/RoHs/E-Mark 10+R112+R87+R6

7" 60W Oval LED Work Light with Swivel Bracket

Item No. **OW-7080-60**



Size: 7" x 5" x 3" (W x H x D)
Beam Pattern: Flood
LED Type: 12 CREE, 5 Watt LEDs
Power: 60 Watts
Brightness: 4,800 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5A @ 12V & 2.5A @ 24V
Color Temperature: 6000K (Cool White)

7" 80W Oval LED Work Light with Swivel Bracket

Item No. **OW-7080-80**



Size: 7" x 5" x 3" (W x H x D)
Beam Pattern: Flood
LED Type: 8 CREE, 10 Watt LEDs
Power: 80 Watts
Brightness: 6,400 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 6.7A @ 12V & 3.3A @ 24V
Color Temperature: 6000K (Cool White)

40 watt led work light for Fendt, Kramer, Valtra, JCB pivot loader

Item No. **OW-4403**



Size: 4.2" x 5.2" x 3.1" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 4 CREE, 10 Watt LEDs
Power: 40 Watts
Brightness: 3,200 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A @ 12V & 1.65A @ 24V
Color Temperature: 6000K (Cool White)

LED Tractor Lights

4.3" 35W LED Compact Flood Lamp

Item No. WL-0352



Size: 4.5" x 4.25" x 3" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 7 Cree, 5 Watt LED
Power: 35 Watts
Brightness: 5,000 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.9A @ 12V & 1.4A @ 24V
Color Temperature: 6000K (Cool White)

4.3" 50W Compact LED Work Light

Item No. WL-0504



Size: 4.5" x 4.25" x 3" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 5 Cree, 10 Watt LED
Power: 50 Watts
Brightness: 6,900 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 4.1A @ 12V & 2.1A @ 24V
Color Temperature: 6000K (Cool White)

5.6 inch 40W Oval LED Tractor Work Lights

Item No. WL-0406



Size: 5.5" x 3.25" x 2.25" (W x H x D)
Beam Pattern: Flood
LED Type: 8 Cree, 5 Watt LED
Power: 40 Watts
Brightness: 3,200 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.2A @ 12V & 1.6A @ 24V
Color Temperature: 6000K (Cool White)

5.9 inch 40W Rectangle LED Tractor Work Lights with Swivel Bracket

Item No. WL-0405



Size: 6" x 3.5" x 3.8" (W x H x D)
Beam Pattern: Flood
LED Type: 8 Cree, 5 Watt LED
Power: 40 Watts
Brightness: 3,600 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A @ 12V & 1.6A @ 24V
Color Temperature: 6000K (Cool White)

5.6 inch 40W Oval LED Tractor Work Lights

Item No. WL-0404



Size: 5.6 inch
Beam Pattern: Flood
LED Type: 8 CREE, 5 Watt LEDs
Power: 40 Watts
Brightness: 3,200 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A @ 12V & 1.66A @ 24V
Color Temperature: 6000K (Cool White)

Kubota LED Oval Cab Light

Item No. WL-0245



Size: 5.5" x 3.25" x 2.25" (W x H x D)
Beam Pattern: Flood
LED Type: 8 LED's
Power: 24 Watts
Brightness: 2,450 effective Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2A

Allis Chalmers/John Deere LED Double-Sided Flashing Light - Amber

Item No. WL-2201




Tiger Lights TLFL2 Light

Size: 4" diameter x 2" depth
Beam Pattern: Flood/flashing
LED Type: 25 LED's per side
Input Voltage: 12-Volt to 24-Volt

Case IH 9100-9300/John Deere Sound-Gard™ LED Flashing Cab Light

Item No. WL-2203



Tiger Lights AR60250 Light

Size: 7.75" x 2" x 1.5" (W x H x D)
Beam Pattern: Flashing/flood
LED Type: 4 LED's
Power: 9 Watts
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 0.75A

LED John Deere Amber Cab Light

Item No. WL-2204



Tiger Lights TL7020 Amber Cab Light

Size: 4.75" x 3.25" x 2.5" (W x H x D)
Beam Pattern: Flood
Power: 7 Watts
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 0.6A

LED Tractor Lights

Case/New Holland Skid Steer LED Headlight

Item No. WL-2209




Tiger Lights 92185C1 Light

Size: 6" x 3.5" x 3" (W x H x D)
 Beam Pattern: Flood
 LED Type: 3 LED's
 Power: 9 Watts
 Input Voltage: 12-Volt to 24-Volt
 Amp Draw: 0.75A

John Deere 7000-9020 Series LED Amber Cab Corner Light

Item No. WL-2210



Tiger Lights TL8045 Light

Size: 8.75" x 4" x 3.5" (W x H x D)
 Beam Pattern: Amber flashing/flood
 Amber light: 18W + 12W resistor
 Power: 18 Watts
 Input Voltage: 12-Volt to 24-Volt
 Amp Draw: 1.5A (Amber light: 2.4A)

AGCO DT-RT/John Deere 5E-9030 LED Amber Cab Corner Light

Item No. WL-2205



Tiger Lights TL8020 Amber Light

Size: 6.75" x 2.75" x 4" (W x H x D)
 Beam Pattern: Flood
 Power: 11 Watts
 Input Voltage: 12-Volt to 24-Volt
 Amp Draw: 0.9A

John Deere 7000-7010 Series LED Left-Hand Outer Hood Light - HI

Item No. TL7810L



Tiger Lights TL7810L Light

Size: 5.1" x 4.2" x 5.87" (W x H x D)
 Beam Pattern: Flood
 Power: 30 Watts
 Input Voltage: 12-Volt to 24-Volt
 Amp Draw: 2.5A

John Deere 7000-7010 Series LED Right-Hand Outer Hood Light - HI

Item No. TL7810R



Tiger Lights TL7810R Light

Size: 5.1" x 4.2" x 5.87" (W x H x D)
 Beam Pattern: Flood
 Power: 30 Watts
 Input Voltage: 12-Volt to 24-Volt
 Amp Draw: 2.5A

Case IH 5100-5200-CX Series LED Left-Hand Wraparound Hood Light

Item No. TL5140L



Tiger Lights TL5140L Light

Size: 7.75" x 4.75" x 4.2" (W x H x D)
 Beam Pattern: High-Low
 Effective Lumens: 4000
 Power: 50 Watts
 Input Voltage: 12-Volt to 24-Volt
 Amp Draw: 4.16A

Case IH 5100-5200-CX Series LED Right-Hand Wraparound Hood Light

Item No. TL5140R



Tiger Lights TL5140R Light

Size: 7.75" x 4.75" x 4.2" (W x H x D)
 Beam Pattern: High-Low
 Effective Lumens: 4000
 Power: 50 Watts
 Input Voltage: 12-Volt to 24-Volt
 Amp Draw: 4.16A

Case IH MX Series Maxxum LED Left-Hand Wraparound Hood Light

Item No. TL6200L



Tiger Lights TL6200L Light

Size: 11" x 8" x 4.2" (W x H x D)
 Beam Pattern: High-Low
 Effective Lumens: 6000
 Power: 80 Watts
 Input Voltage: 12-Volt to 24-Volt
 Amp Draw: 6.6 A

Case IH MX Series Maxxum LED Right-Hand Wraparound Hood Light

Item No. TL6200R



Tiger Lights TL6200R Light

Size: 11" x 8" x 4.2" (W x H x D)
 Beam Pattern: High-Low
 Effective Lumens: 6000
 Power: 80 Watts
 Input Voltage: 12-Volt to 24-Volt
 Amp Draw: 6.6 A

LED Tractor Lights

Case IH CX-JX-MX-STX Series LED Left-Hand Wraparound Hood Light

Item No. **TL6110L**



Tiger Lights TL6110L Light

Size: 11" x 8" x 4.2" (W x H x D)
Beam Pattern: High-Low
Effective Lumens: 5300
Power: 70 Watts
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5.8 A

Case IH CX-JX-MX-STX Series LED Right-Hand Wraparound Hood Light

Item No. **TL6110R**



Tiger Lights TL6110R Light

Size: 11" x 8" x 4.2" (W x H x D)
Beam Pattern: High-Low
Effective Lumens: 5300
Power: 70 Watts
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5.8 A

Case IH MX Magnum-Steiger-STX Steiger 4WD LED Hood Light

Item No. **TL6010**



Tiger Lights TL6010 Light

Size: 10.5" x 4.25" x 4.5" (W x H x D)
Beam Pattern: Flood
Effective Lumens: 7200
Power: 108 Watts
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 9A

John Deere 7020-9030 Series/ Versatile LED Cab/Fender Light

Item No. **TL5680**



Tiger Lights TL5680 Light

Size: 6.5" x 4.5" x 4" (W x H x D)
Beam Pattern: Flood
Effective Lumens: 5200
LED's: 13
Power: 65 Watts
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5.4A

John Deere 5E-9RX Series LED Cab/ Fender/Work Light - Bottom Mount

Item No. **TL8060**



Tiger Lights TL8060 Light

Size: 6" x 3" x 3.25" (W x H x D)
Beam Pattern: Flood
Effective Lumens: 3200
LED's: 8
Power: 40 Watts
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A

Case IH 5140-9240 Combine/John Deere 6R-9RX Series LED Upper Cab Light - Flush Mount

Item No. **TL8050**



Tiger Lights TL8050 Light

Size: 6" x 3" x 3.25" (W x H x D)
Beam Pattern: Flood
Effective Lumens: 3200
LED's: 8
Power: 40 Watts
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A

Challenger MT 400-600/Massey Ferguson 400-8400 LED Handrail Light - Swivel Mount

Item No. **TL7080**



Tiger Lights TL7080 Light

Size: 6.5" x 4" x 3" (W x H x D)
Beam Pattern: Flood
Effective Lumens: 3200
LED's: 8
Power: 40 Watts
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2 A

John Deere 2040-8050 Series LED Red Oval Rear Tail Light

Item No. **TL4560**



Tiger Lights TL4560 Red Oval Tail Light

Size: 7.75" x 3.5" x 1.25" (W x H x D)
Beam Pattern: Flood
Power: 9 Watts
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 0.75A

7inch 50W Rectangular Osram LED Work Lamps for Massey Ferguson

Item No. **OW-6501**



7inch 50W

Size: 177 x 82.5 x 112mm
10-30V DC
10pcs x 5W Osram LEDs
4000 Lumen
IP 68
EMC to CISPR25 Class 4

LED Tractor Lights

4inch 40W LED Tractor Work Lights

Item No. OW-4407



4inch 40W

10-30V DC
4pcs x 10W Osram LEDs
3200 Lumen
IP68
Flood Beam
EMC to CISPR25 Class 4

4inch 40W LED Work Light for Fendt

Item No. OW-4501A



4inch 40W

10-30V DC
4pcs x 10W Osram LEDs
3200 Lumen
IP68
Flood Beam
EMC to CISPR25 Class 4

4inch 40W LED Work Lights for Deutz & Valtra

Item No. OW-4644



4inch 40W

10-30V DC
4pcs x 10W Osram LEDs
3200 Lumen
IP68
Flood Beam
EMC to CISPR25 Class 4

John Deere 2R/3D-E-R/4M-R/5E-M/6D-E/ 2020-4020 Series LED Hood Light - Hi/Lo

Item No. TL5100



Tiger Lights TL5100 Light

Size: 7" x 3.5" x 2.5"(W x H x D)
Beam Pattern: Flood
Effective Lumens: 3500
LED's: 8
Power: 40 Watts
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.3A

5.6inch 45W LED Work Lights for John Deere

Item No. OW-6451



5.6inch 45W

9pcs x 5W CREE LEDs
4100 Lumen
IP68
Flood Beam
EMC to CISPR25 Class 4

Front Indicator Parking Lamp Ford New Holland

Item No. OW-4241



5.5inch 24W

10-30V DC
1W Osram LEDs
Turn light+Position Light
OEM Ref. No.: 44048, 87725693

LED Reverse Lights

6 inch 18W LED Work Lights

Item No. WL-6018



Size: 6" x 2" x 2.2" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 6 CREE, 3 Watt LED
Power: 18 Watts
Brightness: 1,440 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.25A @ 12V & 0.75A @ 24V
Color Temperature: 6000K(Cool White)

6 inch 30W LED Work Lights

Item No. WL-6030



Size: 6" x 2" x 2.2" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 6 CREE, 5 Watt LED
Power: 30 Watts
Brightness: 2,400 Lumens
Input Voltage: 10-30V DC
Amp Draw: 2.5A @ 12V & 1.25A @ 24V
Color Temperature: 6000K(Cool White)

7.6 inch 18W Flush Mount LED Work Light

Item No. WL-0189



Size: 7.6" x 2.5" x 1.8" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 6 CREE, 3 Watt LED
Power: 18 Watts
Brightness: 1,440 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.25A @ 12V & 0.75A @ 24V
Color Temperature: 6000K(Cool White)

7.6 inch 30W Flush Mount LED Work Light

Item No. WL-6031F



Size: 7.6" x 2.5" x 1.8" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 6 CREE, 5 Watt LED
Power: 30 Watts
Brightness: 2,400 Lumens
Input Voltage: 10-30V DC
Amp Draw: 2.5A @ 12V & 1.25A @ 24V
Color Temperature: 6000K(Cool White)

3 inch 18W LED Work Lights

Item No. WL-0184



Size: 3" x 3.5" x 1.7" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 6 Epistar, 3 Watt LED
Power: 18 Watts
Brightness: 1,260 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.5A @ 12V & 0.7A @ 24V
Color Temperature: 6000K(Cool White)

3 inch 12W LED Work Lights

Item No. OW-0802-12



Size: 3" x 3.7" x 1" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 12 OSRAM, 1.5 Watt LEDs
Power: 12 Watts
Brightness: 1,200 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1A@12V/0.5A@24V
Color Temperature: 6000K(Cool White)

3.5 inch 16W LED Work Lights

Item No. OW-0802-16



Size: 3.5" x 4.3" x 1.2" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 16 OSRAM, 1.5 Watt LEDs
Power: 16 Watts
Brightness: 1,600 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.3A@12V/0.7A@24V
Color Temperature: 6000K(Cool White)

4.4 inch 30W LED Work Lights

Item No. OW-0802-30



Size: 4.4" x 5.4" x 1.37" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 30 OSRAM, 1.5 Watt LEDs
Power: 30 Watts
Brightness: 3,000 Lumens
Input Voltage: 10-30V DC
Amp Draw: 2.5A@12V/1.25A@24V
Color Temperature: 6000K(Cool White)

3 inch 12W LED Work Lights

Item No. OW-0702-12



Size: 3" x 3.7" x 1.2" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 12 OSRAM, 1.5 Watt LEDs
Power: 12 Watts
Brightness: 1,200 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1A@12V/0.5A@24V
Color Temperature: 6000K(Cool White)

LED Reverse Lights

3.6 inch 16W LED Work Lights

Item No. OW-0702-16



Size: 3.6" x 4.3" x 1.36" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 16 OSRAM, 1.5 Watt LEDs
Power: 16 Watts
Brightness: 1,600 Lumens
Input Voltage: 10-30V DC
Amp Draw: 1.3A@12V/0.7A@24V
Color Temperature: 6000K(Cool White)

4.5 inch 24W LED Work Lights

Item No. OW-0702-24



Size: 4.5" x 5.3" x 1.55" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 24 OSRAM, 1.5 Watt LEDs
Power: 24 Watts
Brightness: 2,400 Lumens
Input Voltage: 10-30V DC
Amp Draw: 2A@12V/1A@24V
Color Temperature: 6000K(Cool White)

Forklift Warning Lights

4 inch 20W LED Spot Light

Item No. WL-6020A



Size: 3.8" x 3" x 2.9" (W x H x D)
Beam Pattern: Spot
LED Type: 2 CREE, 10 Watt LED
Power: 20 Watts
Brightness: 1600 Lumens
Input Voltage: 10-Volt to 80-Volt
Amp Draw: 1A @ 10V & 0.13A @ 80V
Color: Blue

4 inch 20W Forklift Red Zone Warning Light

Item No. WL-6020B



Size: 3.8" x 3" x 2.9" (W x H x D)
Beam Pattern: Red/Blue zone
LED Type: 2 CREE, 10 Watt LED
Power: 20 Watts
Brightness: 1600 Lumens
Input Voltage: 10-Volt to 80-Volt
Amp Draw: 2A @ 10V & 0.25A @ 80V
Color: Red/Blue

5.5 inch 10W LED Arrows Beam Forklift Blue Light

Item No. WL-0107



Size: 5.6" x 4.7" x 3.5" (W x H x D)
Beam Pattern: Arrow Beams
LED Type: 2 CREE, 5 Watt LED
Power: 10 Watts
Input Voltage: 10-Volt to 80-Volt
Amp Draw: 1A @ 10V & 0.13A @ 80V
Color: Blue/Red

5 inch 45W LED Blue Spot Forklift Safety Lights

Item No. OW-5059-45A



Size: 5 inch 45W
Beam Pattern: Flood/Spot
Power: 9x5W CREE LED
Brightness: 3600 Lumens
Voltage: 9 - 80V
Operation Temperature: -40°~+60° C
Color Temperature: 6000K

5 inch 20W Arch Beam LED Forklift Safety Lights

Item No. OW-6201



Beam Optional: Arc Beam
Power: 1x20W Luminus LED
Effective Lumens: 1200 Lumens
Voltage: 9 - 110V DC
Operation Temperature: -40°~+85° C
Color Temperature: 6000K
Color Optional: Blue, Red, Green

4 inch Square 27W Forklift LED Work Lights

Item No. WL-0275



Size: 4.7" x 5.2" x 2.6" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 9 Cree, 3 Watt LED
Power: 27 Watts
Brightness: 2160 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 1.8A @ 12V & 0.9A @ 24V
Color Temperature: 6000K(Cool White)

4 inch Square 27W Forklift LED Work Lights

Item No. WL-0276



Size: 4" x 4.8" x 3" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 9 Cree, 3 Watt LED
Power: 27 Watts
Brightness: 1620 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.25A @ 12V & 1.2A @ 24V
Color Temperature: 6000K(Cool White)

9 inch Forklift Lamp with Position+ Turn Signal+ DRL+ High/Low Beam

Item No. OW-9921



Beam optional: Hi/Low beam
Power: High Beam 20W+Low beam 30W+DRL 9W, Turn Light 12W, Position Light 2W OSRAM LED
Effective Lumens: 2400 Lumens
Voltage: 9 - 32V DC
Color Temperature: 6000K
Operation Temperature: -40°~+85° C

5 inch 30W Red/Blue Line Beam LED Forklift Safety Lights

Item No. OW-5301



Beam optional: Line Beam
Power: 6x 5W Luminus LED
Effective Lumens: 2400 Lumens
Voltage: 9 - 32V DC
Color Temperature: 6000K
Operation Temperature: -40°~+85° C

Forklift Warning Lights

LED Stop, Tail, Turn & Backup Lights

Item No. WL-3003



Size: 7.5" x 2" (W x H)

LED Type:

9pcs SMD White LED

4pcs SMD Red LED

4pcs SMD Amber LED

Stop:2W DI:1W

Tail:0.5W Reverse:2W

Function:ST/T/DI/Reverse/Reflex

3-3/4 inch Amber LED Strobe Light Beacon

Item No. WL-3002



Size: 5" x 3.7" (W x H)

LED Type: 5pcs*1w high intensity LEDs

LED Power: 5W 1w for each

Operating Voltage: 10-110V DC

Optional Color: Orange

Waterproof rate: IP 65

PC cover and base

Magnet base and warning buzzer optional

5-1/4 inch Amber LED Strobe Light Beacon

Item No. WL-3001



Size: 4" x 5.2" (W x H)

LED Type: 5pcs*1w high intensity LEDs

LED Power: 9W 0.5w for each 30pcs*0.3w

Operating Voltage: 10-110V DC

Optional Color: Orange

Waterproof rate: IP 65

PC cover and base

Magnet base and warning buzzer optional

Spray Boom Lights

4 inch 27W LED Sprayer Boom Lights

Item No. M-0271B



Size: 4.25" x 5.5" x 2.8" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 9 Cree, 3 Watt LED
Power: 27 Watts
Brightness: 2,200 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 2.2A @ 12V & 1.1A @ 24V
Color Temperature: 6000K(Cool White)

5 inch 48W LED Sprayer Boom Lights

Item No. WL-0482B



Size: 5" x 6.1" x 3.5" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: 16 CREE, 3 Watt LED
Power: 48 Watts
Brightness: 3,800 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 4A @ 12V & 2A @ 24V
Color Temperature: 6000K(Cool White)

4.5 inch 45W LED Blue Sprayer Light

Item No. WL-0454



4.5inch 45W
9pcs x 5W CREE LEDs
10-30V DC
Compact blue light
Up to 50 meters wide
Connection: DEUTSCH DT2p
Waterproof: Spray-proof (IP67)
Radio Interference Suppression

Truck and Trailer Lights

Item No. TL-3170



Function: Turn, Brake, Indicator Lamp
LED: 63 LEDs
Volt: 10-30V DC
Dimension: 140 *60mm

Item No. TL-4149



Function: Turn, Brake, Indicator Lamp
LED: 44 LEDs
Volt: 10-30V DC
Dimension: 108 *108mm

Item No. TL-100



Function: Turn, Brake, Indicator Lamp
LED: 48 LEDs
Volt: 10-30V DC
Dimension: 100 *100mm

Item No. TL-274W



Function: Reverse Lamp
LED: 6 White SMDs
Volt: 10-30V DC
Dimension: 100*80*25.4mm

Item No. TL-274A



Function: Rear Direction, Indicator lamp
LED: 6 Amber SMDs
Volt: 10-30V DC
Dimension: 100*80*25.4mm

Item No. TL-274R



Function: Stop/Tail lamp, Indicator lamp
LED: 6 Red SMDs
Volt: 10-30V DC
Dimension: 100*80*25.4mm

Item No. TL-4400



Function: Turn, Brake, Indicator Lamp
LED: 60 SMDs
Volt: 10-30V DC
Dimension: 204*95mm

Item No. TL-276AR



Function: Stop/Tail/Indicator lamp
LED: 9 Amber SMDs+9 Red SMDs
Volt: 10-30V DC
Dimension: 186*100*27.4 mm

Item No. TL-276AW



Function: Reverse/indicator lamp
LED: 9 Amber SMDs+9 White SMDs
Volt: 10-30V DC
Dimension: 186*100*27.4 mm

Item No. TL-276RW



Function: Stop/Tail/Reverse lamp
LED: 9 Red SMDs+9 White SMDs
Volt: 10-30V DC
Dimension: 186*100*27.4 mm

Item No. TL-278AR



Function: Stop/Tail/Indicator lamp
LED: 6 Amber SMDs+6 Red SMDs
Volt: 10-30V DC
Dimension: 146*100*27.4 mm

Item No. TL-278AW



Function: Reverse/indicator lamp
LED: 6 Amber SMDs+6 White SMDs
Volt: 10-30V DC
Dimension: 146*100*27.4 mm

Truck and Trailer Lights

Item No. TL-278RW



Function: Stop/Tail/Reverse lamp
LED: 6 Red SMDs+6 White SMDs
Volt: 10-30V DC
Dimension: 146*100*27.4 mm

Item No. TL-270RAW



Function: Turn, Brake, Reverse, Indicator Lamp
LED: 90 SMDs
Volt: 10-30V DC
Dimension: 270*95mm

Item No. TL270RRA



Function: Turn, Brake, Indicator Lamp
LED: 90 SMDs
Volt: 10-30V DC
Dimension: 270*95mm

Item No. TL-345



Function: Turn, Brake, Reverse, Indicator Lamp, Number-plate lamp
LED: 86 SMDs
Volt: 24V DC
Dimension: 345*125mm

Item No. TL-279ARW



Function: Stop/Tail/Indicator/Reverse lamp
LED: 6 Amber SMDs+9 Red SMDs+6 White SMDs
Volt: 10-30V DC
Dimension: 232*100*27.4 mm

Item No. TL-279ARR



Function: Stop/Tail/Reverse lamp
LED: 6 Red SMDs+9 Red SMDs+6 White SMDs
Volt: 10-30V DC
Dimension: 232*100*27.4 mm

Item No. TL-279RRW



Function: Stop/Tail/Reverse lamp
LED: 6 Red SMDs+9 Red SMDs+6 White SMDs
Volt: 10-30V DC
Dimension: 232*100*27.4 mm

Item No. TL-273W



Function: Reverse lamp
LED: 9 White SMDs
Volt: 10-30V DC
Dimension: 100*100*25.4mm

Item No. TL-273A



Function: Rear Direction, Indicator lamp
LED: 9 Amber SMDs
Volt: 10-30V DC
Dimension: 100*100*25.4mm

Item No. TL-273R



Function: Stop/Tail lamp, Indicator lamp
LED: 9 Red SMDs
Volt: 10-30V DC
Dimension: 100*100* 25.4mm

Item No. TL-277ARW



Function: Stop/Tail/Indicator/Reverse lamp
LED: 9 Amber SMDs+9 Red SMDs+9 White SMDs
Volt: 10-30V DC
Dimension: 272*100*27.4 mm

Item No. TL-277ARR



Function: Stop/Tail/Indicator lamp
LED: 9 Amber SMDs+9 Red SMDs+9 Red SMDs
Volt: 10-30V DC
Dimension: 272*100*27.4 mm

Truck and Trailer Lights

Item No. TL-277RRW



Function: Stop/Tail/Reverse lamp
LED: 9 Red SMDs+9 Red SMDs+9 White SMDs
Volt: 10-30V DC
Dimension: 272*100*27.4 mm

Item No. TL-272W



Function: Reverse lamp
LED: 16 White SMDs
Volt: 10-30V DC
Dimension: 120*120*25.4mm

Item No. TL-272A



Function: Rear Direction/Indicator lamp
LED: 16 Amber SMDs
Volt: 10-30V DC
Dimension: 120*120*25.4mm

Item No. TL-272R



Function: Stop/Tail lamp
LED: 16 Red SMDs
Volt: 10-30V DC
Dimension: 120*120*25.4mm

Item No. TL-280RW



Function: Reverse /Stop/Tail lamp
LED: 9 Red SMDs + 9 White SMDs
Volt: 10-30V DC
Dimension: 212*100*44.5mm

Item No. TL-280AR



Function: Stop/Tail/Indicator lamp
LED: 9 Amber SMDs + 9 Red SMDs
Volt: 10-30V DC
Dimension: 212*100*44.5mm

Item No. TL-280AW



Function: Reverse/Indicator lamp
LED: 9 Amber SMDs + 9 White SMDs
Volt: 10-30V DC
Dimension: 212*100*44.5mm

Item No. TL-281ARR




Function: Stop/Tail/Indicator lamp
LED: 9 Amber SMDs + 9 Red SMDs + 9 Red SMDs
Volt: 10-30V DC
Dimension: 323*100*44.5mm

Item No. TL-281ARW



Function: Stop/Tail/Indicator/Reverse lamp
LED: 9 Amber SMDs + 9 Red SMDs + 9 White SMDs
Volt: 10-30V DC
Dimension: 323*100*44.5mm

Item No. TL-281RRW



Function: Stop/Tail/Reverse lamp
LED: 9 Red SMDs + 9 Red SMDs + 9 White SMDs
Volt: 10-30V DC
Dimension: 323*100*44.5mm

Item No. TL-259AR



Function: Stop/Tail/Indicator lamp
LED: 12Amber +12Red SMDs
Volt: 12V DC
Dimension: 150*80*23mm

Item No. TL-282



Function: Rear Direction/Stop/Tail/Reverse lamp
LED: 8 SMDs
Volt: 10-30V DC
Dimension: 200*50*27mm

Truck and Trailer Lights

Item No. TL-6257



Function: Side Marker Light
LED: 12 SMDs
Volt: 10-30V DC
Dimension: 170*95*180mm

Item No. TL-6256



Function: Side Marker Light
LED: 12 SMDs
Volt: 10-30V DC
Dimension: 95*47*195mm

Item No. TL-6255



Function: Side Marker Light
LED: 12 SMDs
Volt: 10-30V DC
Dimension: 83*80*70mm

Item No. TL-253



Function: Side Marker Light
LED: 8 SMDs
Volt: 10-30V DC
Dimension: 70*35mm

Item No. TL-254



Function: Side Marker Light
LED: 4 SMDs
Volt: 10-30V DC
Dimension: 80*30mm

Item No. TL-255



Function: Side Marker Light
LED: 8 SMDs
Volt: 10-30V DC
Dimension: 70*35mm

Item No. TL-601



Function: Number-Plate light
LED: 3 SMDs
Volt: 10-30V DC
Dimension: 60*30mm

Item No. TL-90



Function: Number-Plate light
LED: 4 SMDs
Volt: 10-30V DC
Dimension: 90*20mm

Item No. TL-80



Function: Number-Plate light
LED: 4 SMDs
Volt: 10-30V DC
Dimension: 80*40mm

Item No. TL-65



Function: Number-Plate light
LED: 4 SMDs
Volt: 10-30V DC
Dimension: 65*25mm

LED Driving Lights

5 inch 60W LED Driving Lights

Item No. OW-5059-60



Size: 5" x 5.9" x 3.4" (W x H x D)
Beam Pattern: Flood
LED Type: 6 CREE, 10 Watt LEDs
Power: 60 Watts
Brightness: 4800 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 5A @ 12V & 2.5A @ 24V
Color Temperature: 6000K(Cool White)

5 inch 45W LED Driving Lights

Item No. OW-5044



Size: 5" x 5.9" x 3.9" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: OSRAM 10W+5W
Power: 45 Watts
Brightness: 4050 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 3.75A @ 12V & 1.9A @ 24V
Color Temperature: 6000K(Cool White)

7 inch 105W LED Driving Lights

Item No. OW-7105



Size: 7" x 7.6" x 4.1" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: OSRAM 10W+5W
Power: 105 Watts
Brightness: 4050 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 8.75A @ 12V & 4.4A @ 24V
Color Temperature: 6000K(Cool White)

9 inch 135W LED Driving Lights


Item No. OW-9136



Size: 8.7" x 9.5" x 3.7" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: OSRAM 10W+5W
Power: 135 Watts
Brightness: 12150 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 11.25A @ 12V & 5.6A @ 24V
Color Temperature: 6000K(Cool White)

9 inch 160W LED Driving Lights

Item No. OW-9160

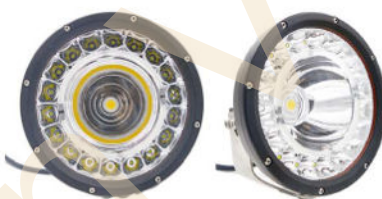

Size: 8.7" x 9.5" x 3.7" (W x H x D)
Beam Pattern: Flood/Spot
LED Type: COB+CREE XBD+CREE XTE
Power: 160 Watts
Brightness: 14400 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 13.3A @ 12V & 6.7A @ 24V
Color Temperature: 6000K(Cool White)

5 inch 60W LED Driving Light

Item No. WL-0603



Size: 5" diameter x 3.9" depth
Beam Pattern: Spot/Combo
LED Type: 6 CREE, 10 Watt LED
Power: 60 Watts
Brightness: 5400 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 4A @ 12V & 2A @ 24V
Color Temperature: 6000K(Cool White)

7 inch 90W LED Driving Light

Item No. WL-0901



Size: 7" diameter x 4.1" depth
Beam Pattern: Spot/Combo
LED Type: 9 CREE, 10 Watt LED
Power: 90 Watts
Brightness: 8100 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 6A @ 12V & 3A @ 24V
Color Temperature: 6000K(Cool White)

7 inch 90W LED Driving Light

Item No. WL-0902



Size: 7" diameter x 4.1" depth
Beam Pattern: Spot/Combo
LED Type: 18 CREE, 5 Watt LED
Power: 90 Watts
Brightness: 8100 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 6A @ 12V & 3A @ 24V
Color Temperature: 6000K(Cool White)

9 inch 120W LED Driving Light

Item No. WL-1201



Size: 9" diameter x 3.7" depth
Beam Pattern: Spot/Combo
LED Type: 12 CREE, 10 Watt LED
Power: 120 Watts
Brightness: 10800 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 8A @ 12V & 4A @ 24V
Color Temperature: 6000K(Cool White)

LED Driving Lights

9 inch 150W LED Driving Light

Item No. WL-1501



Size: 9" diameter x 3.7" depth
Beam Pattern: Spot/Combo
LED Type: 30 CREE, 5 Watt LED
Power: 150 Watts
Brightness: 13500 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 10A @ 12V & 5A @ 24V
Color Temperature: 6000K(Cool White)

9 inch 225W LED Driving Light

Item No. WL-2251



Size: 9" diameter x 3.7" depth
Beam Pattern: Spot/Combo
LED Type: 45 CREE, 5 Watt LED
Power: 225 Watts
Brightness: 20250 Lumens
Input Voltage: 12-Volt to 24-Volt
Amp Draw: 12A @ 12V & 6A @ 24V
Color Temperature: 6000K(Cool White)

Rechargeable LED Work Lights

15W Rechargeable LED Magnetic Work Light

Item No. WL-0154



LED Type: 5-3W High Power Bridgelux LEDs (15W)
Battery: 7.4V 4400mA Rechargeable Li-Ion Battery
Charging Time: 5-6 Hours
Discharge Time: 3-4 Hours (100% Brightness)
Brightness: 1000 Lumens
Life Span of Battery: 500 Times Charge-Discharge
Waterproof Rate: IP65
Working Mode: 30% Energy Saving; 100% High Brightness
• AC and DC Adapter Chargers Included
• Heavy Duty Magnet Base
• SOS Flash Function

Rechargeable LED Magnetic Work Light

Item No. WL-0274



LED Type: 9-3W High Power Bridgelux LEDs (27W)
Battery: 7.4V 6600mA Rechargeable Li-Ion Battery
Charging Time: 5-6 Hours
Discharge Time: 3-4 Hours (100% Brightness)
Brightness: 1800 Lumens
Life Span of Battery: 500 Times Charge-Discharge
Waterproof Rate: IP65
Working Mode: 30% Energy Saving; 100% High Brightness
• AC and DC Adapter Chargers Included
• Heavy Duty Magnet Base
• SOS Flash Function



Tough Industries Limited


website: www.toughlighting.com

Attn: Jenny Lee Phone: +86 13392599852 Mail: jenny@toughlighting.net Skype: [jenny@toughlighting.net](https://www.skype.com/jenny@toughlighting.net)

Item No	Picture	Description	Size	PACKING	Note
YW-850		- LED Power: 30W 2550LM - Operating Voltage: 9-32V DC 6pcs*5w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood 30000 hours above life time - Dimensions : 6.8 inch - Certificates: CE/RoHS/IP68	173*51*73MM	PKG size: 230*86*115mm QTY: 24 pcs/ctn N.W: 0.75kg/pcs Ctn Size: 480*360*365mm Gross weight: 18.5kg	USA CREE XTE LED (5W/PCS) PC optional: Amber/Clear PC
YW-851		- LED Power: 60W 5100LM - Operating Voltage: 9-32V DC 12pcs*5w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood 30000 hours above life time - Dimensions : 13 inch - Certificates: CE/RoHS/IP68	329*51*73MM	PKG size: 385*86*115mm QTY: 12 pcs/ctn N.W: 1.15kg/pcs Ctn Size: 400*360*360mm Gross weight: 14.5kg	USA CREE XTE LED (5W/PCS) PC optional: Amber/Clear PC
YW-852		- LED Power: 90W 7650LM - Operating Voltage: 9-32V DC 18pcs*5w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 19.1 inch - Certificates: CE/RoHS/IP68	485*51*73MM	PKG size: 550*86*115mm QTY: 12 pcs/ctn N.W: 1.55kg/pcs Ctn Size: 550*360*360mm Gross weight: 19.5kg	USA CREE XTE LED (5W/PCS) PC optional: Amber/Clear PC
YW-853		- LED Power: 120W 10200LM - Operating Voltage: 9-32V DC 24pcs*5w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 25.2 inch - Certificates: CE/RoHS/IP68	641*51*73MM	PKG size: 700*86*115mm QTY: 8 pcs/ctn N.W: 1.95kg/pcs Ctn Size: 720*360*250mm Gross weight: 16kg	USA CREE XTE LED (5W/PCS) PC optional: Amber/Clear PC
YW-854		- LED Power: 150W 12750LM - Operating Voltage: 9-32V DC 30pcs*5w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 31.4 inch - Certificates: CE/RoHS/IP68	797*51*73MM	PKG size: 850*86*115mm QTY: 6 pcs/ctn N.W: 2.3kg/pcs Ctn Size: 870*270*250mm Gross weight: 14.5kg	USA CREE XTE LED (5W/PCS) PC optional: Amber/Clear PC
YW-855		- LED Power: 180W 15300LM - Operating Voltage: 9-32V DC 36pcs*5w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 37.5 inch - Certificates: CE/RoHS/IP68	953*51*73MM	PKG size: 1000*86*115mm QTY: 6 pcs/ctn N.W: 2.7kg/pcs Ctn Size: 1025*275*250mm Gross weight: 17kg	USA CREE XTE LED (5W/PCS) PC optional: Amber/Clear PC

YW-856		. LED Power: 210W 17850LM . Operating Voltage: 9-32V DC . 42pcs*5w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (Clear/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 43.7 inch . Certificates: CE/RoHS/IP68	1109*51*73MM	PKG size: 1160*86*115mm QTY: 6pcs/ctn N.W: 3.3kg/pcs Ctn Size: 1080*275*250mm Gross weight: 20.5kg	USA CREE XTE LED (5W/PCS) PC optional: Amber/Clear PC
YW-857		. LED Power: 240W 20400LM . Operating Voltage: 9-32V DC . 48pcs*5w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (Clear/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 50 inch . Certificates: CE/RoHS/IP68	1265*51*73MM	PKG size: 1330*90*120mm QTY: 4pcs/ctn N.W: 4kg/pcs Ctn Size: 1350*195*260mm Gross weight: 16.5kg	USA CREE XTE LED (5W/PCS) PC optional: Amber/Clear PC
YW-8810		. LED Power: 30W 2550LM . Operating Voltage: 9-32V DC . 3pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (Clear/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood . 30000 hours above life time . Dimensions : 6.0 inch . Certificates: CE/RoHS/IP68	152*70*103MM	PKG size: 275*115*115 mm QTY: 12 pcs/ctn N.W: 1.25 kg/pcs Ctn Size: 48*28.1*36.2 cm Gross weight: 14.8 KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-8811		. LED Power: 60W 5100LM . Operating Voltage: 9-32V DC . 6pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (Clear/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood . 30000 hours above life time . Dimensions : 11.3 inch . Certificates: CE/RoHS/IP68	287*70*103MM	PKG size: 430*115*115 mm QTY: 12 pcs/ctn N.W: 2.05 kg/pcs Ctn Size: 48*43.5*36.5 cm Gross weight: 24.4 KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-8812		. LED Power: 90W 7650LM . Operating Voltage: 9-32V DC . 9pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (Clear/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 16.6 inch . Certificates: CE/RoHS/IP68	422*70*103MM	PKG size: 605*115*115 mm QTY: 6 pcs/ctn N.W: 2.85 kg/pcs Ctn Size: 62*36*24.7 cm Gross weight: 17.5 KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-8813		. LED Power: 120W 10200LM . Operating Voltage: 9-32V DC . 12pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (Clear/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 21.9 inch . Certificates: CE/RoHS/IP68	557*70*103MM	PKG size: 660*115*115 mm QTY: 6 pcs/ctn N.W: 3.65 kg/pcs Ctn Size: 67*36*24.5 cm Gross weight: 22.3KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-8814		. LED Power: 150W 12750LM . Operating Voltage: 9-32V DC . 15pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (Clear/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 27.2 inch . Certificates: CE/RoHS/IP68	692*70*103MM	PKG size: 895*115*115 mm QTY: 6 pcs/ctn N.W: 4.45 kg/pcs Ctn Size: 90*36*24.5 cm Gross weight: 27.1KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC

YW-8815		- LED Power: 180W 15300LM - Operating Voltage: 9-32V DC 18pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 32.6 inch - Certificates: CE/RoHS/IP68	827*70*103MM	PKG size: 895*115*115 mm QTY: 4 pcs/ctn N.W: 5.25 kg/pcs Ctn Size: 102.3*24*25 cm Gross weight: 20.3KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-8816		- LED Power: 210W 17850LM - Operating Voltage: 9-32V DC 21pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 37.9 inch - Certificates: CE/RoHS/IP68	962*70*103MM	PKG size: 1010*115*115 mm QTY: 4 pcs/ctn N.W: 6.05kg/pcs Ctn Size: 102.3*24*25 cm Gross weight: 24.3KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-8817		- LED Power: 240W 20400LM - Operating Voltage: 9-32V DC 24pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 43.2 inch - Certificates: CE/RoHS/IP68	1097*70*103MM	PKG size: 1125*115*115 mm QTY: 4 pcs/ctn N.W: 6.85kg/pcs Ctn Size: 137*26*27 cm Gross weight: 28.5KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-8818		- LED Power: 270W 22950LM - Operating Voltage: 9-32V DC 27pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 48.5 inch - Certificates: CE/RoHS/IP68	1232*70*103MM	PKG size: 1345*120*120 mm QTY: 4pcs/ctn N.W: 7.65 kg/pcs Ctn Size: 137*26*27 cm Gross weight: 31.7KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-8819		- LED Power: 300W 25500LM - Operating Voltage: 9-32V DC 30pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 53.8 inch - Certificates: CE/RoHS/IP68	1367*70*103MM	PKG size: 1455*120*120 mm QTY: 4pcs/ctn N.W: 8.45 kg/pcs Ctn Size: 148*26*27 cm Gross weight: 34KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-890		- LED Power: 60W 5100LM - Operating Voltage: 9-32V DC 6pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood 30000 hours above life time - Dimensions : 6.0 inch - Certificates: CE/RoHS/IP68	152*127.5*103MM	PKG size: 275*115*115 mm QTY: 12 pcs/ctn N.W: 1.25 kg/pcs Ctn Size: 48*28.1*36.2 cm Gross weight: 14.8 KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-891		- LED Power: 120W 10200LM - Operating Voltage: 9-32V DC 12pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC (Clear/Amber Color) - Mounting Bracket: Stainless steel bracket - Beam: 30degree Spot/60degree flood 30000 hours above life time - Dimensions : 11.3 inch - Certificates: CE/RoHS/IP68	287*127.5*103MM	PKG size: 430*115*115 mm QTY: 12 pcs/ctn N.W: 2.05 kg/pcs Ctn Size: 48*43.5*36.5 cm Gross weight: 24.4 KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC

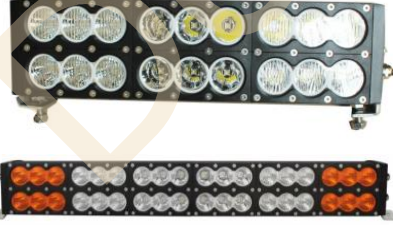YW-892		. LED Power: 180W 15300LM . Operating Voltage: 9-32V DC . 18pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (Clear/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 16.6 inch . Certificates: CE/RoHS/IP68	422*127.5*103MM	PKG size: 605*115*115 mm QTY: 6 pcs/ctn N.W: 2.85 kg/pcs Ctn Size: 62*36*24.7 cm Gross weight: 17.5 KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-893		. LED Power: 240W 20400LM . Operating Voltage: 9-32V DC . 24pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (White/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 21.9 inch . Certificates: CE/RoHS/IP68	557*127.5*103MM	PKG size: 660*115*115 mm QTY: 6 pcs/ctn N.W: 3.65 kg/pcs Ctn Size: 67*36*24.5 cm Gross weight: 22.3KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-894		. LED Power: 300W 2550LM . Operating Voltage: 9-32V DC . 30pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (White/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 27.2 inch . Certificates: CE/RoHS/IP68	692*127.5*103MM	PKG size: 895*115*115 mm QTY: 6 pcs/ctn N.W: 4.45 kg/pcs Ctn Size: 90*36*24.5 cm Gross weight: 27.1KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-895		. LED Power: 360W 30600LM . Operating Voltage: 9-32V DC . 36pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (White/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 32.6 inch . Certificates: CE/RoHS/IP68	827*127.5*103MM	PKG size: 895*115*115 mm QTY: 4 pcs/ctn N.W: 5.25 kg/pcs Ctn Size: 102.3*24*25 cm Gross weight: 20.3KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-896		. LED Power: 420W 35700LM . Operating Voltage: 9-32V DC . 42pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (White/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 37.9 inch . Certificates: CE/RoHS/IP68	962*127.5*103MM	PKG size: 1010*115*115 mm QTY: 4 pcs/ctn N.W: 6.05kg/pcs Ctn Size: 102.3*24*25 cm Gross weight: 24.3KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-897		. LED Power: 480W 40800LM . Operating Voltage: 9-32V DC . 48pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (White/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 43.2 inch . Certificates: CE/RoHS/IP68	1097*127.5*103MM	PKG size: 1125*115*115 mm QTY: 4 pcs/ctn N.W: 6.85kg/pcs Ctn Size: 137*26*27 cm Gross weight: 28.5KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-898		. LED Power: 540W 45900LM . Operating Voltage: 9-32V DC . 54pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (Clear/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 48.5 inch . Certificates: CE/RoHS/IP68	1232*127.5*103MM	PKG size: 1345*120*120 mm QTY: 4pcs/ctn N.W: 7.65 kg/pcs Ctn Size: 137*26*27 cm Gross weight: 31.7KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC

YW-899		. LED Power: 600W 510000LM . Operating Voltage: 9-32V DC . 60pcs*10w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC (Clear/Amber Color) . Mounting Bracket: Stainless steel bracket . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 53.8 inch . Certificates: CE/RoHS/IP68	1367*127.5*103MM	PKG size: 1455*120*120 mm QTY: 4pcs/ctn N.W: 8.45 kg/pcs Ctn Size: 148*26*27 cm Gross weight: 34KG	USA CREE XM-L LED (10W/PCS) PC optional: Amber/Clear PC
YW-800		. LED Power: 18W 1350LM . Operating Voltage: 9-32V DC . 6pcs*3w high intensity Epistar EDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 30degree Spot/60degree flood . 30000 hours above life time . Dimensions : 4.3 inch . Certificates: CE/RoHS/IP68	108*107*76MM	PKG size: 195*115*115 mm QTY: 20 pcs/ctn N.W: 0.8 kg/pcs Ctn Size: 59.5*40.5*25.5 cm Gross weight: 17KG	Two optional brackets , Standard with Bottom Bracket
YW-801		. LED Power: 36W 2700LM . Operating Voltage: 9-32V DC . 12pcs*3w high intensity Epistar LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 7.3 inch . Certificates: CE/RoHS/IP68	186*107*76MM	PKG size: 275*115*115 mm QTY: 12 pcs/ctn N.W: 1.2 kg/pcs Ctn Size: 48*40.5*36.2 cm Gross weight: 15.4 KG	Two optional brackets , Standard with Bottom Bracket
YW-802		. LED Power: 54W 4050LM . Operating Voltage: 9-32V DC . 18pcs*3w high intensity Epistar LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 10.3 inch . Certificates: CE/RoHS/IP68	264*107*76MM	PKG size: 430*115*115 mm QTY: 12 pcs/ctn N.W: 1.6 kg/pcs Ctn Size: 48*43.5*36.5 cm Gross weight: 20.2 KG	Two optional brackets , Standard with Bottom Bracket
YW-803		. LED Power: 72W 5400LM . Operating Voltage: 9-32V DC . 24pcs*3w high intensity Epistar LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 13.5 inch . Certificates: CE/RoHS/IP68	342*107*76MM	PKG size: 430*115*115 mm QTY: 12 pcs/ctn N.W: 2.05kg/pcs Ctn Size: 48*43.5*36.5 cm Gross weight: 25.6KG	Two optional brackets , Standard with Bottom Bracket
YW-803-1		. LED Power: 90W 6750LM . Operating Voltage: 9-32V DC . 30pcs*3w high intensity Epistar LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 16.5 inch . Certificates: CE/RoHS/IP68	420*107*76MM	PKG size: 450*115*115 mm QTY: 6 pcs/ctn N.W: 3 kg/pcs Ctn Size: cm Gross weight: KG	Two optional brackets , Standard with Bottom Bracket
YW-804		. LED Power: 108W 8100LM . Operating Voltage: 9-32V DC . 36pcs*3w high intensity Epistar LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 19.6 inch . Certificates: CE/RoHS/IP68	498*107*76MM	PKG size: 605*115*115 mm QTY: 6 pcs/ctn N.W: 3 kg/pcs Ctn Size: 62*36*24.7 cm Gross weight: 19 KG	Two optional brackets , Standard with Bottom Bracket

YW-805		- LED Power: 126W 9450LM - Operating Voltage: 9-32V DC 42pcs*3w high intensity Epistar LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 22.6 inch - Certificates: CE/RoHS/IP68	576*107*76MM	PKG size: 660*115*115 mm QTY: 6 pcs/ctn N.W: 3.4 kg/pcs Ctn Size: 61*36*24.5 cm Gross weight: 21.5 KG	Two optional brackets , Standard with Bottom Bracket
YW-805-1		- LED Power: 144W 10800LM - Operating Voltage: 9-32V DC 48pcs*3w high intensity Epistar LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 25.7 inch - Certificates: CE/RoHS/IP68	654*107*76MM	PKG size: 660*115*115 mm QTY: 6 pcs/ctn N.W: kg/pcs Ctn Size: cm Gross weight: KG	Two optional brackets , Standard with Bottom Bracket
YW-806		- LED Power: 180W 13500LM - Operating Voltage: 9-32V DC 60pcs*3w high intensity Epistar LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 31.9 inch - Certificates: CE/RoHS/IP68	810*107*76MM	PKG size: 895*115*115 mm QTY: 6 pcs/ctn N.W: 4.4 kg/pcs Ctn Size: 90*36*24.5 cm Gross weight: 28KG	Two optional brackets , Standard with Bottom Bracket
YW-807		- LED Power: 234W 17550LM - Operating Voltage: 9-32V DC 78pcs*3w high intensity Epistar LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 41.1 inch - Certificates: CE/RoHS/IP68	1044*107*76MM	PKG size: 1125*115*115 mm QTY: 4 pcs/ctn N.W: 5.6 kg/pcs Ctn Size: 114*26*27 cm Gross weight: 23.9 KG	Two optional brackets , Standard with Bottom Bracket
YW-808		- LED Power: 270W 20250LM - Operating Voltage: 9-32V DC 90pcs*3w high intensity Epistar LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 47.2 inch - Certificates: CE/RoHS/IP68	1200*107*76MM	PKG size: 1200*115*115 mm QTY: 4 pcs/ctn N.W: kg/pcs Ctn Size: cm Gross weight: KG	Two optional brackets , Standard with Bottom Bracket
YW-809		- LED Power: 288W 21600LM - Operating Voltage: 9-32V DC 96pcs*3w high intensity Epistar LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 50.3 inch - Certificates: CE/RoHS/IP68	1278*107*76MM	PKG size: 1345*120*120 mm QTY: 4 pcs/ctn N.W: 7.2kg/pcs Ctn Size: 137*26*37 cm Gross weight: 30.5 KG	Two optional brackets , Standard with Bottom Bracket
YW-820		- LED Power: 18W 1530LM - Operating Voltage: 9-32V DC 6pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood 30000 hours above life time - Dimensions : 4.3 inch - Certificates: CE/RoHS/IP68	108*107*76MM	PKG size: 195*115*115 mm QTY: 20 pcs/ctn N.W: 0.8 kg/pcs Ctn Size: 59.5*40.5*25.5 cm Gross weight: 17KG	

YW-821		. LED Power: 36W 3060LM . Operating Voltage: 9-32V DC . 12pcs*3w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material:Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optionl . Beam:30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 7.3 inch . Certificates:CE/RoHs/IP68	186*107*76MM	PKG size: 275*115*115 mm QTY: 12 pcs/ctn N.W: 1.2 kg/pcs Ctn Size: 48*40.5*36.2 cm Gross weight: 15.4 KG	18W-90W with Standard Bottom Brackets(if need side brackets, please mark that)
YW-822		. LED Power: 54W 4590LM . Operating Voltage: 9-32V DC . 18pcs*3w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material:Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optionl . Beam:30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 10.3 inch . Certificates:CE/RoHs/IP68	264*107*76MM	PKG size: 430*115*115 mm QTY: 12 pcs/ctn N.W: 1.6 kg/pcs Ctn Size: 48*43.5*36.5 cm Gross weight: 20.2 KG	
YW-823		. LED Power: 72W 6120LM . Operating Voltage: 9-32V DC . 24pcs*3w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material:Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optionl . Beam:30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 13.5 inch . Certificates:CE/RoHs/IP68	342*107*76MM	PKG size: 430*115*115 mm QTY: 12 pcs/ctn N.W: 2.05kg/pcs Ctn Size: 48*43.5*36.5 cm Gross weight: 25.6KG	
YW-823-1		. LED Power: 90W 7650LM . Operating Voltage: 9-32V DC . 30pcs*3w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material:Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optionl . Beam:30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 16.5 inch . Certificates:CE/RoHs/IP68	420*107*76MM	PKG size: 450*115*115 mm QTY: 6 pcs/ctn N.W: kg/pcs Ctn Size: cm Gross weight: KG	
YW-824		. LED Power: 108W 9180LM . Operating Voltage: 9-32V DC . 36pcs*3w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material:Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optionl . Beam:30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 19.6 inch . Certificates:CE/RoHs/IP68	498*107*76MM	PKG size: 605*115*115 mm QTY: 6 pcs/ctn N.W: 3 kg/pcs Ctn Size: 62*36*24.7 cm Gross weight: 19 KG	
YW-825		. LED Power: 126W 10710LM . Operating Voltage: 9-32V DC . 42pcs*3w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material:Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optionl . Beam:30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 22.6 inch . Certificates:CE/RoHs/IP68	576*107*76MM	PKG size: 660*115*115 mm QTY: 6 pcs/ctn N.W: 3.4 kg/pcs Ctn Size: 61*36*24.5 cm Gross weight: 21.5 KG	108W-288W with two brackets: Bottom and Side Brackets
YW-825-1		. LED Power: 144W 12240LM . Operating Voltage: 9-32V DC . 48pcs*3w high intensity CREE LEDs . Waterproof rate: IP68 . Color Temperature: 6000K . Material:Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optionl . Beam:30degree Spot/60degree flood/Combo . 30000 hours above life time . Dimensions : 25.7 inch . Certificates:CE/RoHs/IP68	654*107*76MM	PKG size: 660*115*115 mm QTY: 6 pcs/ctn N.W: kg/pcs Ctn Size: cm Gross weight: KG	

YW-826		- LED Power: 180W 15300LM - Operating Voltage: 9-32V DC 60pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material:Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optionl - Beam:30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 31.9 inch - Certificates:CE/RoHs/IP68	810*107*76MM	PKG size: 895*115*115 mm QTY: 6 pcs/ctn N.W: 4.4 kg/pcs Ctn Size: 90*36*24.5 cm Gross weight: 28KG	
YW-827		- LED Power: 234W 19890LM - Operating Voltage: 9-32V DC 78pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material:Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optionl - Beam:30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 41.1 inch - Certificates:CE/RoHs/IP68	1044*107*76MM	PKG size: 1125*115*115 mm QTY: 4 pcs/ctn N.W: 5.6 kg/pcs Ctn Size: 114*26*27 cm Gross weight: 23.9 KG	
YW-828		- LED Power: 270W 22950LM - Operating Voltage: 9-32V DC 90pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material:Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optionl - Beam:30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 47.2 inch - Certificates:CE/RoHs/IP68	1200*107*76MM	PKG size: 1200*115*115 mm QTY: 4 pcs/ctn N.W: kg/pcs Ctn Size: cm Gross weight: KG	108W-288W with two brackets: Bottom and Side Brackets
YW-829		- LED Power: 288W 24480LM - Operating Voltage: 9-32V DC 96pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material:Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optionl - Beam:30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 50.3 inch - Certificates:CE/RoHs/IP68	1278*107*76MM	PKG size: 1345*120*120 mm QTY: 4 pcs/ctn N.W: 7.2kg/pcs Ctn Size: 137*26*37 cm Gross weight: 30.5 KG	
YW-8120		- LED Power: 56W 4760LM - Operating Voltage: 9-32V DC 6*3w(Beside), 2*10w(Middle) CREE - Waterproof rate: IP68 - Color Temperature: 6000K - Material:Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optionl - Beam:25degree Spot/60degree Flood(Beside), 10degree Spot (middle) 30000 hours above life time - Dimensions : 10.4 inch - Certificates:CE/RoHs/IP68	264*107*76MM	PKG size: 430*115*115 mm QTY: 12 pcs/ctn N.W: 1.6 kg/pcs Ctn Size: 48*43.5*43.5 cm Gross weight: 20.2 KG	
YW-8121		- LED Power: 76W 6460LM - Operating Voltage: 9-32V DC 6*3w(Beside), 4*10w(Middle) CREE - Waterproof rate: IP68 - Color Temperature: 6000K - Material:Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optionl - Beam:25degree Spot/60degree Flood(Beside), 10degree Spot (middle) 30000 hours above life time - Dimensions : 13.5 inch - Certificates:CE/RoHs/IP68	342*107*76MM	PKG size: 430*115*115 mm QTY: 12 pcs/ctn N.W: 2.05 kg/pcs Ctn Size: 48*43.5*43.5 cm Gross weight: 25.6KG	USA CREE XM-L LED (10W/PCS), USA CREE XB-D LED (3W/PCS), 56W-96W Only with Standard Bottom Brackets

YW-8121		. LED Power: 96W 8160LM . Operating Voltage: 9-32V DC 6*3w(Beside) ,6*10w(Middle) CREE . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 25degree Spot/60degree Flood(Beside), 10degree Spot (middle) . 30000 hours above life time . Dimensions : 16.5 inch . Certificates: CE/RoHS/IP68	420*107*76MM	PKG size: 600*115*115 mm QTY: 6 pcs/ctn N.W: 2.5 kg/pcs Ctn Size: 62.5*36*24.7cm Gross weight: 16.5KG	
YW-8122		. LED Power: 116W 9860LM . Operating Voltage: 9-32V DC 6*3w(Beside) ,8*10w(Middle) CREE . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 25degree Spot/60degree Flood(Beside), 10degree Spot (middle) . 30000 hours above life time . Dimensions : 19.6 inch . Certificates: CE/RoHS/IP68	498*107*76MM	PKG size: 605*115*115 mm QTY: 6 pcs/ctn N.W: 3 kg/pcs Ctn Size: 62*36*24.7cm Gross weight: 19 KG	
YW-8123		. LED Power: 132W 11220LM . Operating Voltage: 9-32V DC 12*3w(Beside) ,6*10w(Middle) CREE . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 25degree Spot/60degree Flood(Beside), 10degree Spot (middle) . 30000 hours above life time . Dimensions : 22.7 inch . Certificates: CE/RoHS/IP68	576*107*76MM	PKG size: 660*115*115 mm QTY: 6 pcs/ctn N.W: 3.4kg/pcs Ctn Size: 67*36*24.5cm Gross weight: 30.10 KG	USA CREE LED XM-L (10W/PCS), USA CREE XB-D LED (3W/PCS), 96W-304W with Bottom brackets and Side brackets
YW-8123		. LED Power: 152W 12920LM . Operating Voltage: 9-32V DC 12*3w(Beside) ,8*10w(Middle) CREE . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 25degree Spot/60degree Flood(Beside), 10degree Spot (middle) . 30000 hours above life time . Dimensions : 25.7 inch . Certificates: CE/RoHS/IP68	654*107*76MM	PKG size: 810*115*115 mm QTY: 6 pcs/ctn N.W: 3.7kg/pcs Ctn Size: 90*36*24.5 cm Gross weight: 23.7 KG	
YW-8124		. LED Power: 192W 16320LM . Operating Voltage: 9-32V DC 12*3w(Beside) ,12*10w(Middle) CREE . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 25degree Spot/60degree Flood(Beside), 10degree Spot (middle) . 30000 hours above life time . Dimensions : 31.9 inch . Certificates: CE/RoHS/IP68	810*107*76MM	PKG size: 895*115*115 mm QTY: 6 pcs/ctn N.W: 4.4 kg/pcs Ctn Size: 90*36*24.5 cm Gross weight: 27.9 KG	
YW-8125		. LED Power: 248W 21080LM . Operating Voltage: 9-32V DC 18*3w(Beside) ,14*10w(Middle) CREE . Waterproof rate: IP68 . Color Temperature: 6000K . Material: Diecast aluminum housing . Lens material: PC . Mounting Bracket: Alu firm bracket . Bracket: Two kinds optional . Beam: 25degree Spot/60degree Flood(Beside), 10degree Spot (middle) . 30000 hours above life time . Dimensions : 41.1 inch . Certificates: CE/RoHS/IP68	1044*107*76MM	PKG size: 1125*115*115 mm QTY: 4 pcs/ ctn N.W: 5.6 kg/pcs Ctn Size: 114*24.3*24.3 cm Gross weight: 23.9 KG	USA CREE XM-L LED (10W/PCS), USA CREE XB-D LED (3W/PCS), 96W-304W

YW-8126		LED Power: 284W 24140LM Operating Voltage: 9-32V DC 24*3w(Beside) ,14*10w(Middle) CREE Waterproof rate: IP68 Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Bracket: Two kinds optionl Beam:25degree Spot/60degree Flood(Beside), 10degree Spot (middle) 30000 hours above life time Dimensions: 47.2 inch Certificates:CE/RoHs/IP68	1200*107*76MM	PKG size: 1345*120*120 mm QTY: 4 pcs/ ctn N.W: 6.6 kg/pcs Ctn Size: 137*26*27 cm Gross weight: 27.9KG	with Bottom brackets and Side brackets
YW-8127		LED Power: 304W 25840LM Operating Voltage: 9-32V DC 24*3w(Beside) ,16*10w(Middle) CREE Waterproof rate: IP68 Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Bracket: Two kinds optionl Beam:25degree Spot/60degree Flood(Beside), 10degree Spot (middle) 30000 hours above life time Dimensions : 50.3 inch Certificates:CE/RoHs/IP68	1278*107*76MM	PKG size: 1345*120*120 mm QTY: 4 pcs/ctn N.W: 7.2 kg/pcs Ctn Size: 137*26*37 cm Gross weight: 30.3 KG	
YW-8100		LED Power: 20W 1700LM Operating Voltage: 9-32V DC 2pcs*10w high intensity CREE LEDs Waterproof rate: IP68 Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Bracket: Two kinds optionl Beam:30degree Spot/60degree Flood Beam 30000 hours above life time Dimensions : 4.3 inch Certificates:CE/RoHs/IP68	108*107*76MM	PKG size: 195*115*115 mm QTY: 20 pcs/ctn N.W: 0.8 kg/pcs Ctn Size: 59.5*40.5*25.5 cm Gross weight: 17KG	USA CREE XM-L LED (10W/PCS)
YW-8101		LED Power: 40W 3400LM Operating Voltage: 9-32V DC 4pcs*10w high intensity CREE LEDs Waterproof rate: IP68 Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Bracket: Two kinds optionl Beam:30degree Spot/60degree Flood Beam 30000 hours above life time Dimensions : 7.3 inch Certificates:CE/RoHs/IP68	186*107*76MM	PKG size: 275*115*115 mm QTY: 12 pcs/ctn N.W: 1.2 kg/pcs Ctn Size: 48*28.1*36.2 cm Gross weight: 15.4KG	USA CREE XM-L LED (10W/PCS)
YW-8102		LED Power: 60W 5100LM Operating Voltage: 9-32V DC 6pcs*10w high intensity CREE LEDs Waterproof rate: IP68 Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Bracket: Two kinds optionl Beam:30degree Spot/60degree flood/Combo 30000 hours above life time Dimensions : 10.4 inch Certificates:CE/RoHs/IP68	264*107*76MM	PKG size: 430*115*115 mm QTY: 12 pcs/ctn N.W: 1.6 kg/pcs Ctn Size: 48*43.5*36.5 cm Gross weight: 20.2 KG	USA CREE XM-L LED (10W/PCS)
YW-8103		LED Power: 80W 6800LM Operating Voltage: 9-32V DC 8pcs*10w high intensity CREE LEDs Waterproof rate: IP68 Color Temperature: 6000K Material:Diecast aluminum housing Lens material: PC Mounting Bracket: Alu firm bracket Bracket: Two kinds optionl Beam:30degree Spot/60degree flood/Combo 30000 hours above life time Dimensions : 13.5 inch Certificates:CE/RoHs/IP68	342*107*76MM	PKG size: 430*115*115 mm QTY: 12pcs/ctn N.W: 20.5 kg/pcs Ctn Size: 48*43.5*26.5 cm Gross weight: 25.6KG	USA CREE XM-L LED (10W/PCS)

YW-8103-1		- LED Power: 100W 8500LM - Operating Voltage: 9-32V DC 10pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 16.5 inch - Certificates: CE/RoHS/IP68	420*107*76MM	PKG size: 430*115*115 mm QTY: 6pcs/ctn N.W: kg/pcs Ctn Size: cm Gross weight: KG	USA CREE XM-L LED (10W/PCS)
YW-8104		- LED Power: 120W 10200LM - Operating Voltage: 9-32V DC 12pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 20 inch - Certificates: CE/RoHS/IP68	498*107*76MM	PKG size: 605*115*115 mm QTY: 6 pcs/ctn N.W: 3 kg/pcs Ctn Size: 62*36*24.7 cm Gross weight: 19KG	USA CREE XM-L LED (10W/PCS)
YW-8105		- LED Power: 140W 11900LM - Operating Voltage: 9-32V DC 14pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 22.6 inch - Certificates: CE/RoHS/IP68	576*107*76MM	PKG size: 660*115*115 mm QTY: 6 pcs/ctn N.W: 3.4 kg/pcs Ctn Size: 67*36*24.5 cm Gross weight: 21.5 KG	USA CREE XM-L LED (10W/PCS)
YW-8105-1		- LED Power: 160W 13600LM - Operating Voltage: 9-32V DC 16pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 25.7 inch - Certificates: CE/RoHS/IP68	654*107*76MM		USA CREE XM-L LED (10W/PCS)
YW-8106		- LED Power: 200W 17000LM - Operating Voltage: 9-32V DC 20pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 31.9 inch - Certificates: CE/RoHS/IP68	810*107*76MM	PKG size: 895*115*115 mm QTY: 6 pcs/ctn N.W: 4.4 kg/pcs Ctn Size: 90*36*24.5 cm Gross weight: 27.9KG	USA CREE XM-L LED (10W/PCS)
YW-8107		- LED Power: 260W 22100LM - Operating Voltage: 9-32V DC 26pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 41.1 inch - Certificates: CE/RoHS/IP68	1044*107*76MM	PKG size: 1125*115*115 mm QTY: 4 pcs/ctn N.W: 5.6 kg/pcs Ctn Size: 114*24.3*24.3 cm Gross weight: 23.9KG	USA CREE XM-L LED (10W/PCS)
YW-8108		- LED Power: 300W 25500LM - Operating Voltage: 9-32V DC 30pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 47.2 inch - Certificates: CE/RoHS/IP68	1200*107*76MM	PKG size: 1345*120*120 mm QTY: 4 pcs/ctn N.W: 6.6 kg/pcs Ctn Size: 137*26*27 cm Gross weight: 27.9KG	USA CREE XM-L LED (10W/PCS)

YW-8109		- LED Power: 320W 27200LM - Operating Voltage: 9-32V DC 32pcs*10w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 50.3 inch - Certificates: CE/RoHS/IP68	1278*107*76MM	PKG size: 1345*120*120 mm QTY: 4 pcs/ctn N.W: 7.2 kg/pcs Ctn Size: 137*26*27 cm Gross weight: 30.3 KG	USA CREE XM-L LED (10W/PCS)
YW-830		- LED Power: 18W 1530LM - Operating Voltage: 9-32V DC 6pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood 30000 hours above life time - Dimensions : 3.9 inch - Certificates: CE/RoHS/IP68	99*73*107MM	PKG size: 195*115*115 mm QTY: 20 pcs/ctn N.W: 0.75 kg/pcs Ctn Size: 595*405*255 mm Gross weight: 16KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
YW-831		- LED Power: 36W 3060LM - Operating Voltage: 9-32V DC 12pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 6.6 inch - Certificates: CE/RoHS/IP68	167*73*107MM	PKG size: 275*115*115 mm QTY: 12 pcs/ctn N.W: 1.05 kg/pcs Ctn Size: 480*281*360 mm Gross weight: 14 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
YW-832		- LED Power: 54W 4590LM - Operating Voltage: 9-32V DC 18pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 9.3 inch - Certificates: CE/RoHS/IP68	235*73*107MM	PKG size: 430*115*115 mm QTY: 12 pcs/ctn N.W: 1.35kg/pcs Ctn Size: 480*435*365 mm Gross weight: 17.5 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
YW-833		- LED Power: 72W 6120LM - Operating Voltage: 9-32V DC 24pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 12.0 inch - Certificates: CE/RoHS/IP68	305*73*107MM	PKG size: 430*115*115 mm QTY: 12 pcs/ctn N.W: 1.83 kg/pcs Ctn Size: 480*435*365 mm Gross weight: 23 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
YW-834		- LED Power: 90W 7650LM - Operating Voltage: 9-32V DC 30pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 14.6 inch - Certificates: CE/RoHS/IP68	370*73*110MM	PKG size: 600*115*115 mm QTY: 6 pcs/ctn N.W: 2.5 kg/pcs Ctn Size: 620*36*247 mm Gross weight: 15.5 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket

YW-835	  	- LED Power: 108W 9180LM - Operating Voltage: 9-32V DC 36pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 17.2 inch - Certificates: CE/RoHS/IP68	438*73*107MM	PKG size: 600*115*115 mm QTY: 6 pcs/ctn N.W: 2.55 kg/pcs Ctn Size: 620*360*247 mm Gross weight: 16 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
YW-836	  	- LED Power: 126W 10710LM - Operating Voltage: 9-32V DC 42pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 19.9 inch - Certificates: CE/RoHS/IP68	505*73*107MM	PKG size: 600*115*115 mm QTY: 6 pcs/ctn N.W: 2.88 kg/pcs Ctn Size: 620*360*247mm Gross weight: 18.5KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
YW-836-1	  	- LED Power: 144W 12240LM - Operating Voltage: 9-32V DC 48pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 22.6 inch - Certificates: CE/RoHS/IP68	573*73*107MM	PKG size: 660*115*115 mm QTY: 6 pcs/ctn N.W: 3.5 kg/pcs Ctn Size: 670*360*247 mm Gross weight: 19.6 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
YW-836-2	  	- LED Power: 162W 13770LM - Operating Voltage: 9-32V DC 54pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 25.2 inch - Certificates: CE/RoHS/IP68	641*73*107MM	PKG size: 807*115*115 mm QTY: 6 pcs/ctn N.W: 3.37 kg/pcs Ctn Size: 817*360*245 mm Gross weight: 21.5 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
YW-863-3	  	- LED Power: 180W 15300LM - Operating Voltage: 9-32V DC 60pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 28.0 inch - Certificates: CE/RoHS/IP68	710*107*73MM	PKG size: 807*115*115 mm QTY: 6pcs/ctn N.W: 3.64 kg/pcs Ctn Size: 817*360*245 mm Gross weight: 23 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
YW-836-4	  	- LED Power: 198W 16830LM - Operating Voltage: 9-32V DC 66pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 30.6 inch - Certificates: CE/RoHS/IP68	778*73*114MM	PKG size: 895*115*115 mm QTY: 6pcs/ctn N.W: 4.5 kg/pcs Ctn Size: 900*360*245 mm Gross weight: 27.5 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket

YW-837		- LED Power: 234W 19890LM - Operating Voltage: 9-32V DC 78pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 36.0 inch - Certificates: CE/RoHS/IP68	914*107*73MM	PKG size: 1006*115*115 mm QTY: 4 pcs/ctn N.W: 4.75 kg/pcs Ctn Size: 1023*240*250 mm Gross weight: 21 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
YW-838		- LED Power: 288W 24480LM - Operating Voltage: 9-32V DC 96pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 44.0 inch - Certificates: CE/RoHS/IP68	1118*73*116MM	PKG size: 1345*120*120 mm QTY: 4 pcs/ctn N.W: 5.56 kg/pcs Ctn Size: 137*26*27 cm Gross weight: 23.5 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
YW-839		- LED Power: 324W 27540LM - Operating Voltage: 9-32V DC 108pcs*3w high intensity CREE LEDs - Waterproof rate: IP68 - Color Temperature: 6000K - Material: Diecast aluminum housing - Lens material: PC - Mounting Bracket: Alu firm bracket - Bracket: Two kinds optional - Beam: 30degree Spot/60degree flood/Combo 30000 hours above life time - Dimensions : 49.4 inch - Certificates: CE/RoHS/IP68	1254*73*117MM	PKG size: 1345*120*120 mm QTY: 4 pcs/ctn N.W: 6.05 kg/pcs Ctn Size: 137*26*27 cm Gross weight: 25.5 KG	USA CREE XB-D LED (3W/PCS) Two brackets optional: Side/Bottom bracket
Remark:					
1.Payment Term: EXW Price					
2.Delivery time: Sample order 15 Working Day, Bulk Order 30 Working Day.					
3.Warranty: 12 Months					
4.Payment Way: T/T, Paypal, Western Union etc.					
5.Certificates:   					